

**This Page Is Inserted by IFW Operations
and is not a part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PHOTOSENSITIVE LITHOGRAPHIC PRINTING PLATE

FIELD OF THE INVENTION

5 The present invention relates to a photosensitive lithographic printing plate, and in particular to such that is suited for imaging with a laser light.

BACKGROUND OF THE INVENTION

10 Conventionally, as the photosensitive lithographic printing plate, there have been widely used so-called PS plates comprising a hydrophilic support and an oleophilic
15 photosensitive resin layer provided on the support. Plate making with such a plate has usually been carried out by a masked (planar) exposure with use of a lith film, followed by elimination of non-image areas by dissolution.

20 In recent years, digital technologies with which image information is electronically processed, stored and outputted with a computer is prevailing. To cope with such digital technologies, a variety of image outputting processes have been developed for practical use. As a result, the computer-to-plate (CTP) technology that modulates a highly directional light such
25 as a laser beam in accordance with digitized image information

for scanning exposure to directly prepare a printing plate without using a lith film is eagerly demanded. Hence, the development of a photosensitive lithographic printing plate adapted to the CTP technology is a significant technical target.

5 For such photosensitive lithographic printing plates suited for scanning exposure, a structure comprising a hydrophilic support and provided thereon an oleophilic photosensitive resin layer (which will be referred to as a photosensitive layer hereinafter) capable of generating an
10 active species such as a radical or Brönsted acid by laser exposure has been proposed, and is already available in the market. A negative or positive type lithographic printing plate can be obtained by exposing such a photosensitive lithographic printing plate to a scanning laser light modulated by digital
15 information to generate such active species, causing a physical or chemical change in the photosensitive layer to make the layer insoluble or soluble by the action of the species, and subjecting the plate to a subsequent development processing.

In particular, the negative type photosensitive
20 lithographic printing plate comprising a hydrophilic support and provided thereon a photo-polymerizable photosensitive layer containing a photo polymerization initiator excelling in photographic speed, an ethylenically unsaturated compound capable of addition polymerization, a polymer binder soluble
25 in an alkaline developer, and an oxygen-shielding protective

layer which may be provided according to need is endowed with a potential of becoming a plate having desirable printing characteristics due to its various advantageous features including an excellent productivity, simple processing, and
5 a high resolution as well as a superior ink-receptivity.

Conventionally, in order to make a printing plate durable for long run lengths, urethane resins have been used as the binder as described in Japanese Patent Publication Nos. 120040/1995, 120041/1995, 120042/1995 and 12424/1996, Japanese
10 Patent Laid-Open Nos. 287944/1988, 287947/1988 and 271741/1989, etc. However, these patent specifications include no description on the imaging with laser scanning exposure at all. On the other hand, Japanese Patent Application No. 116232/1999 describes a lithographic printing plate comprising a urethane
15 binder suited for laser scanning exposure, but this type of lithographic printing plate is not satisfactory in printing durability and productivity. Specifically, when the scanning speed is raised for a higher productivity, the amount of exposure energy per unit area correspondingly reduces to cause the
20 discrimination between the exposed and the unexposed areas to reduce whereby the image area tends to be attacked by the alkaline ingredient in the developer, leading to insufficient printing durability.

As a polymer binder constituting a photosensitive layer
25 there has also been used an alkali-developable organic high

09985872-110601
molecular polymer such as methacrylic acid copolymer, acrylic acid copolymer, itaconic acid copolymer, crotonic acid copolymer, maleic acid copolymer and partially esterified maleic acid copolymer as described in Japanese Patent Laid-Open No. 1984-44615, Japanese Patent Publication No. 1979-34327, Japanese Patent Publication No. 1983-12577, Japanese Patent Publication No. 1979-25957, Japanese Patent Laid-Open No. 1979-92723, Japanese Patent Laid-Open No. 1984-53836, Japanese Patent Laid-Open No. 1984-71048, etc.

10 However, the conventional negative-working photosensitive lithographic printing plate comprising a photosensitive layer containing such a polymer binder is disadvantageous in that when the scanning speed is raised for a higher productivity, the amount of exposure energy per unit area correspondingly reduces, making it impossible to effect sufficient hardening even at the exposed area and hence causing the image area to be attacked by the alkaline ingredient in the developer and leading to insufficient printing durability. Thus, further improvement of productivity is made difficult.

20

SUMMARY OF THE INVENTION

The object of the invention is to provide a photosensitive lithographic printing plate which overcomes the

above-mentioned shortcomings in the conventional technologies,
is capable of forming a highly durable printing plate, suited
for scanning exposure with laser, capable of high speed image
recording, and provided with a high productivity.

5 As a result of an extensive investigation, the present
inventors have found that the object cited above can be achieved
by using, as the polymer binder for the photosensitive layer,
a urethane resin which has an aliphatic cyclic structure having
a carboxylic group as a substituent directly or indirectly
10 attached to said structure as the component imparting a
developability to said urethane resin.

Accordingly, the invention provides, as a first preferred
embodiment, a photosensitive lithographic printing plate
comprising a support and a photosensitive layer provided thereon,
15 said photosensitive layer comprising a polyurethane resin
binder having an aliphatic cyclic structure which has a carboxyl
group as a substituent directly or indirectly attached to said
structure.

In the first preferred embodiment, a feature of the
20 photosensitive lithographic printing plate of the invention
is to use such a urethane resin as a polymer binder as comprising
an alicyclic structure having a carboxyl group directly or
indirectly attached thereto as a substituent imparting an
alkali-developability to said urethane resin. By the use of
25 such a binder, the photosensitive lithographic printing plate

of the invention is imparted with a sufficient printing durability as well as a high productivity even with exposure conditions of low irradiation energy per unit area.

Although the mechanism with which the advantageous
5 feature of the invention is developed is not clarified yet,
it is assumed that the introduction of a highly water-repellent
cyclic hydrocarbon structure near the carboxylic acid group
prevents the penetration of the developer, thus giving rise
to a high printing durability, in contrast to the conventionally
10 known urethane binders whereby the developer penetrates into
the image area obtained by an exposure of a relatively small
irradiation energy. Due to such a mechanism, printing plates
with both of a high productivity and a high printing durability
can be obtained.

15 The inventors made extensive studies of accomplishment
of the foregoing object. As a result, it was found that the
foregoing object of the invention can be accomplished by using
as the polymer binder constituting the photosensitive layer
a modified polyvinyl alcohol resin containing an alicyclic
20 structure. The present invention has thus been worked out.

The present invention provides, as a second preferred
embodiment, a photosensitive lithographic printing plate
comprising a photosensitive layer containing a polyvinyl
alcohol resin binder modified with an acetal skeleton having
25 an alicyclic structure.

In the second preferred embodiment, a feature of the photosensitive lithographic printing plate of the invention is to use as a polymer binder a polyvinyl alcohol resin modified with an acetal skeleton having an alicyclic structure. In this arrangement, the photosensitive lithographic printing plate of the invention is imparted with a sufficient printing durability as well as a high productivity even with exposure conditions of low irradiation energy per unit area.

Although the mechanism with which the advantageous feature of the invention is developed is not clarified yet, it is assumed that the use of a polyvinyl alcohol resin modified with an acetal skeleton having a highly hydrophobic alicyclic structure prevents the penetration of the developer, thus giving rise to a high printing durability, in contrast to the conventionally known polymer binder whereby the developer penetrates into the image area obtained by an exposure of a relatively small irradiation energy. Due to such a mechanism, printing plates with both of a high productivity and a high printing durability can be obtained.

20

DETAILED DESCRIPTION OF THE INVENTION

In the following, the photosensitive layer of the photosensitive lithographic printing plate will be described


in detail.

[Polymer Binder in the first preferred embodiment of the invention]

5 The polymer binder for use in the photosensitive layer of the photosensitive lithographic printing plate of the invention comprises a polyurethane resin binder containing an alicyclic structure having a carboxyl group directly or indirectly attached thereto.

10 Preferable polyurethane resins in the invention can be obtained by the reaction of a compound containing an alicyclic structure and two groups selected from carboxyl, hydroxyl and -NHR¹ groups (wherein R¹ represents a hydrogen atom or a substituted or unsubstituted monovalent hydrocarbon group of
15 1 to 20 carbon atoms) with a diisocyanate compound.

As the compound containing an alicyclic structure and two groups selected from carboxyl, hydroxyl and -NHR¹ group (wherein R¹ represents a hydrogen atom or a substituted or unsubstituted monovalent hydrocarbon group of 1 to 20 carbon
20 atoms), those represented by formula (I) are preferred.



25 (In the formula, A represents an (n+2)-valent hydrocarbon

group of 3 to 80 carbon atoms having a substituted or unsubstituted aliphatic cyclic structure; each of X's represents independently a hydroxyl group or -NHR^1 (R^1 represents a hydrogen atom or a substituted or unsubstituted monovalent hydrocarbon group of 1 to 20 carbon atoms.); and n represents an integer of from 1 to 5.

The $(n+2)$ -valent hydrocarbon group of 3 to 80 carbon atoms having a substituted or unsubstituted alicyclic structure and represented by A in formula (I) includes the compound in which a $(n+2)$ -valent hydrocarbon group is formed by eliminating $(n+2)$ hydrogen atoms attached to arbitrary carbon atoms of a compound containing an alicyclic structure such as cyclopropane, cyclopentane, cyclohexane, cycloheptane, cyclooctane, cyclodecane, dicyclohexyl, tercyclohexyl, norbornane, decahydronaphthalene, perhydrofluorene, tricyclo[5.2.1.0^{2,5}]decane, adamantane, quadracycline, congressane, cubane, spiro[4.4]octane, cyclopentene, cyclohexene, cycloheptene, cyclooctene, cyclodecene, cyclohexadiene, cycloheptadiene, cyclooctadiene, cycloheptatriene, cyclodecatriene, cyclooctatetraene, norbornylene, octahydronaphthalene, bicyclo[2.2.1]heptadiene, bicyclo[4.3.0]nonadiene, dicyclopentadiene, hexahydroanthracene or spiro[4.5]decadiene.

Any one or more carbon atoms of the compound having an

alicyclic structure may be replaced with a hetero atom selected from nitrogen, oxygen or sulfur.

From the viewpoint of printing durability, group A is preferably a 5- to 8-membered monocyclic aliphatic hydrocarbon group, a condensed polycyclic aliphatic hydrocarbon group comprising up to 4 rings, a spiroaliphatic hydrocarbon group or an ensemble of aliphatic hydrocarbon rings.

As the substituent, monovalent non-metallic atom groups other than hydrogen are typical such as a halogen atom (-F, -Br, -Cl or -I), an alkoxy group, an aryloxy group, an alkylthio group, an arylthio group, an alkyldithio group, an aryldithio group, an N,N-dialkylamino group, an N,N-diarylamino group, an N-alkyl-N-arylamino group, an acyloxy group, a carbamoyloxy group, an N-alkylcarbamoyloxy group, an N-arylcarbamoyloxy group, an N,N-dialkylcarbamoyloxy group, an N,N-diarylcarbamoyloxy group, an N-alkyl-N-arylcarbamoyloxy group, an alkylsulfoxy group, an arylsulfoxy group, an acylthio group, an acylamino group, an N-alkylacylamino group, an N-arylacylamino group, a ureido group, an N'-alkylureido group, an N', N'-dialkylureido group, an N'-arylureido group, an N'-diarylureido group, an N'-alkyl-N'-arylureido group, an N-alkylureido group, an N-arylureido group, an N'-alkyl-N-alkylureido group, an N'-alkyl-N-arylureido group, an N', N'-dialkyl-N-alkylureido group, an N', N'-dialkyl-N-arylureido group, an N'-aryl-N-alkylureido

- group, an N'-aryl-N-aryluroido group, an
 N',N'-diaryl-N-alkylureido group, an
 N',N'-diaryl-N-aryluroido group, an
 N'-alkyl-N'-aryl-N-alkylureido group, an
 5 N'-alkyl-N'-aryl-N-aryluroido group, an alkoxycarbonylamino
 group, an aryloxycarbonylamino group, an
 N-alkyl-N-alkoxycarbonylamino group, an
 N-alkyl-N-aryloxycarbonylamino group, an
 N-aryl-N-alkoxycarbonylamino group, an
 10 N-aryl-N-aryloxycarbonylamino group, a formyl group, an acyl
 group, a carbonyl group and the conjugate base group thereof,
 an alkoxycarbonyl group, an aryloxycarbonyl group, a carbamoyl
 group, an N-alkylcarbamoyl group, an N,N-dialkylcarbamoyl
 group, an N-arylcaramoyl group, an N,N-diarylcaramoyl group,
 15 an N-alkyl-N-arylcaramoyl group, an alkylsulfinyl group, an
 arylsulfinyl group, an alkylsulfonyl group, an arylsulfonyl
 group, a sulfo ($-SO_3H$) group and the conjugate base group thereof,
 an alkoxysulfonyl group, an aryloxysulfonyl group, a
 sulfinamoyl group, an N-alkylsulfinamoyl group, an
 20 N,N-dialkylsulfinamoyl group, an N-arylsulfinamoyl group, an
 N,N-diarylsulfinamoyl group, an N-alkyl-N-arylsulfinamoyl
 group, a sulfamoyl group, an N-alkylsulfamoyl group, an
 N,N-dialkylsulfamoyl group, an N-arylsulfamoyl group, an
 N,N-diarylsulfamoyl group, an N-alkyl-N-arylsulfamoyl group,
 25 an N-acylsulfamoyl group and the conjugate base group thereof,

an N-alkylsulfonylsulfamoyl group $[-SO_2NHSO_2(alkyl)]$ and the conjugate base group thereof, an N-arylsulfonylsulfamoyl group $[-SO_2NHSO_2(aryl)]$ and the conjugate base group thereof, an N-alkylsulfonylcarbamoyl group $[-CONHSO_2(alkyl)]$ and the conjugate base group thereof, an N-arylsulfonylcarbamoyl group $[-CONHSO_2(aryl)]$ and the conjugate base group thereof, an alkoxyisilyl group $[-Si(O-alkyl)_3]$, an aryloxyisilyl group $[-Si(O-aryl)_3]$, a hydroxyisilyl group $[-Si(OH)_3]$ and the conjugate base group thereof, a phosphono group $(-PO_3H_2)$ and the conjugate base group thereof, a dialkylphosphono group $[-PO_3(alkyl)_2]$, a diarylphosphono group $[-PO_3(aryl)_2]$, an alkylarylphosphono group $[-PO_3(alkyl)(aryl)]$, a monoalkylphosphono group $[-PO_3H(alkyl)]$ and the conjugate base group thereof, a monoarylphosphono group $[-PO_3H(aryl)]$ and the conjugate base group thereof, a phosphonoxy group $(-OPO_3H_2)$ and the conjugate base group thereof, a dialkylphosphonoxy group $[-OPO_3(alkyl)_2]$, a diarylphosphonoxy group $[-OPO_3(aryl)_2]$, an alkylarylphosphonoxy group $[-OPO_3(alkyl)(aryl)]$, a monoalkylphosphonoxy group $[-OPO_3H(alkyl)]$ and the conjugate base group thereof, a monoarylphosphonoxy group $[-OPO_3H(aryl)]$ and the conjugate base group thereof, a cyano group, a nitro group, a dialkylboryl group $[-B(alkyl)_2]$, a diarylboryl group $[-B(aryl)_2]$, an alkylarylboryl group $[-B(alkyl)(aryl)]$, a dihydroxyboryl group $[-B(OH)_2]$ and the conjugate base group thereof, an alkylhydroxyboryl group $[-B(alkyl)(OH)]$ and the

conjugate base group thereof, an arylhydroxyboryl group
[-B(aryl)(OH)] and the conjugate base group thereof, an alkyl
group, an aryl group, an alkenyl group and an alkynyl group.

Preferable substituents include a halogen atom, an alkyl
5 group, an alkoxy group, an aryloxy group, an aryl group, an
alkenyl group and an alkynyl group.

In formula (I), X represents a hydroxyl group or an -NHR¹
group wherein R¹ represents a substituted or unsubstituted
monovalent hydrocarbon group of 1 to 20 carbon atoms.

10 As the hydrocarbon group of 1 to 20 carbon atoms, an alkyl
group, an aryl group, an alkenyl group and an alkynyl group
are included.













The substituent which R¹ may have includes those
enumerated as the one which A may have.

15 Due to the ease of synthesis, each of A's is preferably
a hydroxyl group or an amino group independently of each other.
And more preferably at least one of A's is a hydroxyl group,
which is still more preferably a primary hydroxyl group.











Symbol n represents an integer of 1 to 5. From the
20 viewpoint of printing durability, n is preferably 1 to 3, more
preferably equal to 1.











In the following, specific examples of preferable
compounds represented by formula (I) will be listed, however,
the invention is not restricted to those at all.









25














The chemical structure shows a complex polycyclic core, possibly a tricyclic system, heavily substituted with chlorine atoms (Cl). A carboxylic acid group (-COOH) is attached to one of the ring carbons. A side chain is attached to another carbon, consisting of an ester linkage (-O-C(=O)-) followed by a carbon atom bonded to two hydroxyl groups (-OH) and a methyl group (-CH₃).



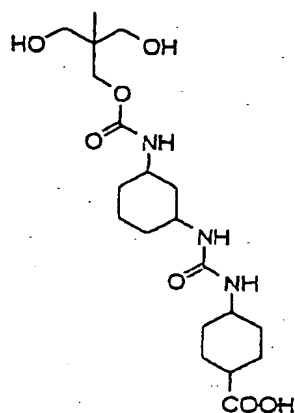

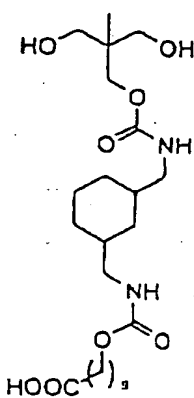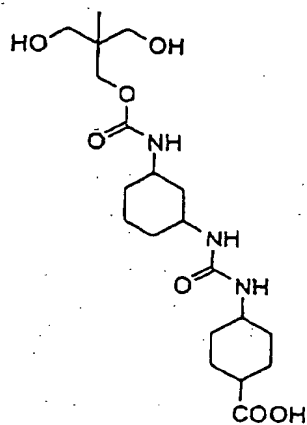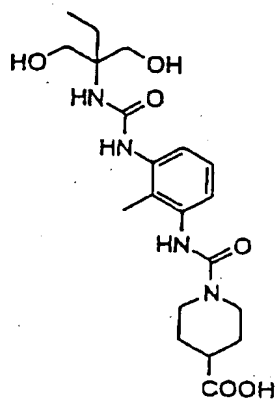



One or more types of the structures derived from the compounds represented by formula (I) may be contained in the urethane resin binder.

5 Though the urethane resin polymer for the invention can be synthesized only from a diisocyanate compound and a compound represented by formula (I), it can be usually synthesized with use of one or more still other diol compounds.

10 Although appropriately determined depending on the structure, the design of the photosensitive layer, and other factors, the total content of the repeating unit represented by formula (I) in the urethane resin polymer obtained from such combinations of compounds preferably lies in the range of from 1 to 50 mol%, more preferably from 10 to 50 mol%, and still 15 more preferably from 20 to 50 mol% based on the total molar quantity of the polymer used.

From the viewpoint of developability and printing durability, the urethane resin binder for the invention preferably has a desirable molecular weight and acid value. 20 Though the molecular weight and the acid value are adjusted in consideration of pH of a developer, composition of a developer, performance necessary for a printing plate, and the like, the molecular weight of the urethane resin binder is, as GPC value in terms of polystyrene, from 5,000 to 500,000, preferably from 25 10,000 to 300,000, more preferably from 20,000 to 150,000. In

the case of the molecular weight being less than 5,000, printing durability gets worse. In the case of the molecular weight being no less than 500,000, developability gets worse and stain is generated. The acid value of the urethane resin binder is
5 from 0.1 to 10.0 meq/g, preferably from 0.3 to 6.0 meq/g, more preferably from 0.6 to 3.0 meq/g. In the case of the acid value being less than 0.1 meq/g, stain is generated because of bad developability. In the case of the acid value being no less than 6.0 meq/g, printing durability gets worse.

10 Any diisocyanate compound and diol compound known in the art which are jointly used with a compound represented by formula (I) can be employed without any special restriction. Specifically, those given in *Kobunshi Deta Handobukku - Kiso Hen* (Polymer Data Handbook - Fundamentals) edited by The Society
15 of Polymer Science, Japan, published by Baifukan Co., Ltd. in 1986. Such a diisocyanate compound as well as a diol compound that is used in conjunction with a compound represented by formula (I) may be used individually or in combination of two or more of them.

20 Specific examples of the diisocyanate compound include aromatic diisocyanates such as 2,4-tolylenediisocyanate, the dimer of 2,4-tolylenediisocyanate, 2,6-tolylenediisocyanate, p-xylylenediisocyanate, m-xylylenediisocyanate, 4,4'-diphenylmethanediisocyanate,
25 1,5-naphthylenediisocyanate, and

05985872-110601

3,3'-dimethylbiphenyl-4,4'-diisocyanate; aliphatic diisocyanates such as hexamethylenediisocyanate, trimethylhexamethylenediisocyanate, lysine diisocyanate, and dimerized acid diisocyanates; alicyclic diisocyanates such as

5 isopholonediiisocyanate,

4,4'-methylenebis(cyclohexylisocyanate), methylcyclohexane-2,4-(or 2,6-)diisocyanates, and 1,3-(isocyanatemethyl)cyclohexane; the reaction products of a diol and a diisocyanate such as the addition product of 1

10 mol of 1,3-butylene glycol with 2 mols of tolylenediisocyanate.

Specific examples of the diol compound include ethylene glycol, diethylene glycol, triethylene glycol, tetraethylene glycol, propylene glycol, dipropylene glycol, poly(ethylene glycol), poly(propylene glycol), neopentyl glycol,

15 1,3-butylene glycol, 1,6-hexanediol, 2-butene-1,4-diol, 2,2,4-trimethyl-1,3-pentanediol,

1,4-bis- β -hydroxyethoxycyclohexane, cyclohexanedimethanol, tricyclodecanedimethanol, hydrogenated bisphenol A, hydrogenated bisphenol F, ethylene oxide adducts of bisphenol

20 A, propylene oxide adducts of bisphenol A, ethylene oxide adducts of bisphenol F, propylene oxide adducts of bisphenol F, ethylene oxide adducts of hydrogenated bisphenol A, propylene oxide adducts of hydrogenated bisphenol A, hydroquinone dihydroxyethyl ether, p-xylylene glycol,

25 dihydroxyethylsulfone, bis(2-hydroxyethyl)-2,4-tolylene

- dicarbamate, 2,4-tolylene-bis(2-hydroxyethyl carbamide),
bis(2-hydroxyethyl)-m-xylylene dicarbamate,
bis(2-hydroxyethyl) isophthalate, 1,3-propanediol,
1,4-butanediol, 1,5-pentanediol, 1,6-hexanediol,
5 1,7-heptanediol, 1,8-octanediol, 2-butene-1,4-diol,
cis-2-butene-1,4-diol, trans-2-butene-1,4-diol, catechol,
resorcin, hydroquinone, 4-methylcatechol, 4-t-butylcatechol,
4-acetylcatechol, 3-methoxycatechol, 4-phenylcatechol,
4-methylresorcin, 4-ethylresorcin, 4-t-butylresorcin,
10 4-hexylresorcin, 4-chlororesorcine, 4-benzylresorcin,
4-acetylresorcin, 4-carbomethoxyresorcin, 2-methylresorcin,
5-methylresorcin, t-butylhydroquinone,
2,5-di-t-butylhydroquinone, 2,5-di-t-amylhydroquinone,
tetramethylhydroquinone, tetrachlorohydroquinone,
15 methylcarbaminohydroquinone, methylureidohydroquinone,
methylthiohydroquinone, benzonorbornene-3,6-diol, bisphenol
A, bisphenol S, 3,3'-dichlorobisphenol S,
4,4'-dihydroxybenzophenone, 4,4'-dihydroxybiphenyl,
4,4'-thiodiphenol, 2,2'-dihydroxydiphenylmethane,
20 3,4-bis(p-hydroxyphenyl)hexane,
1,4-bis(2-(p-hydroxyphenyl)propyl)benzene,
bis(4-hydroxyphenyl)methylamine, 1,3-dihydroxynaphthalene,
1,4-dihydroxynaphthalene, 1,5-dihydroxynaphthalene,
2,6-dihydroxynaphthalene, 1,5-dihydroxyanthraquinone,
25 2-hydroxybenzyl alcohol, 4-hydroxybenzyl alcohol,

09985872-110601

2-hydroxy-3,5-di-t-butylbenzyl alcohol,
4-hydroxy-3,5-di-t-butylbenzyl alcohol, 4-hydroxyphenethyl
alcohol, 2-hydroxyethyl-4-hydroxy benzoate,
2-hydroxyethyl-4-hydroxyphenyl acetate, resorcin
5 mono-2-hydroxyethyl ether, and various polyether diol
compounds such as pentaethylene glycol, hexaethylene glycol,
heptaethylene glycol, octaethylene glycol, di-1,2-propylene
glycol, tri-1,2-propylene glycol, tetra-1,2-propylene glycol,
hexa-1,2-propylene glycol, di-1,3-propylene glycol,
10 tri-1,3-propylene glycol, tetra-1,3-propylene glycol,
di-1,3-butylene glycol, tri-1,3-butylene glycol,
hexa-1,3butylene glycol,
poly(ethylene glycol)s with average molecular weights of 1,000,
1,500, 2,000, 3,000, and 7,500, poly(propylene glycol)s with
15 average molecular weights of 400, 700, 1,000, 2,000, 3,000 and
4,000, PTMG 650, PTMG 1000, PTMG 20000, PTMG 3000, Newpole PE-61,
Newpole PE-62, Newpole PE-64, Newpole PE-68, Newpole PE-71,
Newpole PE-74, Newpole PE-75, Newpole PE-78, Newpole PE-108,
Newpole PE-128, Newpole BPE-20, Newpole BPE-20F, Newpole
20 BPE-20NK, Newpole BPE-20T, Newpole BPE-20G, Newpole BPE-40,
Newpole BPE-60, Newpole BPE-100, Newpole BPE-180, Newpole BP-2P,
Newpole BPE-23P, Newpole BPE-3P, Newpole BPE-5P, Newpole
50HB-100, Newpole 50HB-260, Newpole 50HB-400, Newpole 50HB-660,
Newpole 50HB-2000 and Newpole 50HB-5100 (PMTG and Newpole are
25 products of Sanyo Chemical Industries, Ltd.), and polyester

diol compounds and polycarbonate diol compounds.

Also, diol compounds having a carboxyl group can be jointly used such as 3,5-dihydroxybenzoic acid,

2,2-bis(hydroxymethyl)propionic acid,

5 2,2-bis(2-hydroxyethyl)propionic acid,

2,2-bis(3-hydroxypropyl)propionic acid,

bis(hydroxymethyl)acetic acid, bis(4-hydroxyphenyl)acetic acid, 2,2-bis(hydroxymethyl)lactic acid,

4,4-bis(4-hydroxyphenyl)pentanoic acid, tartaric acid,

10 N,N-dihydroxyethylglycin, and

N,N-bis(2-hydroxyethyl)-3-carboxy-propionamide.

Further, the following compounds can be used. Aliphatic diamine compounds such as ethylenediamine, propylenediamine, tetramethylenediamine, pentamethylenediamine,

15 hexamethylenediamine, heptamethylenediamine,

octamethylenediamine, dodecamethylenediamine,

propane-1,2-diamine, bis(3-aminopropyl)methylamine,

1,3-bis(3-aminopropyl)tetramethylsiloxane, piperazine,

2,5-dimethylpiperazine, N-(2-aminoethyl)piperazine,

20 4-amino-2,2,6,6-tetramethylpiperazine,

N,N-dimethylethylenediamine, lysine, L-cystine, and

isophoronediamine; aromatic diamine compounds such as

o-phenylenediamine, m-phenylenediamine, p-phenylenediamine,

2,4-tolylenediamine, benzidine, o-ditoluidine, o-dianisidine,

25 4-nitro-m-phenylenediamine,

2,5-dimethoxy-p-phenylenediamine,
 bis-(4-aminophenyl)sulfone, 4-carboxy-o-phenylenediamine,
 3-carboxy-m-phenylenediamine, 4,4'-diaminophenyl ether, and
 1,8-naphthalenediamine; heterocyclic amine compounds such as
 5 2-aminoimidazole, 3-aminotriazole, 5-amino-1H-tetrazole,
 4-aminopyrazole, 2-aminobenzimidazole,
 2-amino-5-carboxytriazole, 2,4-diamino-6-methyl-s-triazine,
 2,6-diaminopyridine, L-histidine, DL-triptophane, and
 adenine; aminoalcohols or aminophenols such as ethanolamine,
 10 N-methylethanolamine, N-ethylethanolamine,
 1-amino-2-propanol, 1-amino-3-propanol,
 2-aminoethoxyethanol, 2-aminothioethoxyethanol,
 2-amino-2-methyl-1-propanol, p-aminophenol, m-aminophenol,
 o-aminophenol, 4-methyl-2-aminophenol,
 15 2-chloro-4-aminophenol, 4-methoxy-3-aminophenol,
 4-hydroxybenzylamine, 4-amino-1-naphthol, 4-aminosalicylic
 acid, 4-hydroxy-N-phenylglycine, 2-aminobenzyl alcohol,
 4-aminophenethyl alcohol, 2-carboxy-5-amino-1-naphthol, and
 L-tyrosine.
 20 To cap the unreacted terminal isocyanate group with an
 alcohol having a radical polymerizable group in the polymer
 synthesis for the purpose of reaction termination is preferred
 since a urethane polymer which exhibits an improved printing
 durability can be prepared. Alcohols having a radical
 25 polymerizable group include 2-hydroxyethyl (meth)acrylate,

05985876 110601
2-hydroxypropyl (meth)acrylate, 2-hydroxy-3-chloropropyl
(meth)acrylate, 2-hydroxy-3-allyloxypropyl (meth)acrylate,
2-hydroxy-3-phenoxypropyl (meth)acrylate, 4-hydroxybutyl
(meth)acrylate, glycerol diacrylate, glycerol acrylate
5 methacrylate, glycerol dimethacrylate, pentaerithritol
triacrylate, and tris(acryloyloxyethyl) isocyanurate.

The urethane binder in the invention may be used
individually, or in combination of two or more thereof. Further,
one or more of conventionally known polymer binders may be added
10 to prepare blends. When such a blend is used, the conventional
polymer binder is added in 1 to 60% by weight, preferably 1
to 40% by weight, more preferably 1 to 20% by weight of the
total amount of binder. As the conventionally known polymer
binder, any material known in the art may be used without special
15 restriction, preferably including binders having an acrylate
main chain, urethane binders, and acetal-modified poly(vinyl
alcohol)s (e.g., butyral resins).


20

[Polymer Binder in the second preferred embodiment of the
invention]

The polymer binder to be used in the photosensitive layer
of the photosensitive lithographic printing plate of the
25 invention is a polyvinyl alcohol resin modified with an acetal

skeleton having an alicyclic structure.

The foregoing polyvinyl alcohol resin binder of the invention is not specifically limited so far as it is modified with an acetal skeleton having an alicyclic structure. In practice, however, one having a constituent unit represented by the following formula (II) may be used.



wherein R^1 represents a C_3 - C_{30} monovalent hydrocarbon group having an alicyclic structure which may have substituents.

Examples of the C_3 - C_{30} monovalent hydrocarbon group having an alicyclic structure which may have substituents as R^1 in the formula (II) include the compound in which a monovalent hydrocarbon group is formed by eliminating one hydrogen atom attached to arbitrary carbon atoms of a compound containing an alicyclic structure such as cyclopropane, cyclopentane, cyclohexane, cyclooctane, cyclodecane, dicyclohexyl, tercyclohexyl, norbornane, decahydronaphthalene, perhydrofluorene, tricyclo[5.2.1.0^{2,6}] decane, adamantane, quadracycline, congressane, cubane, spiro[4.4]octane, cyclopentene, cyclohexene, cycloheptene, cyclooctene, cyclodecene, dyclohexadiene, cycloheptene, cycloheptadiene,

09985872-110601

cyclooctadiene, cycloheptatriene, cyclodecatriene, cyclooctatetraene, norbornylene, octahydronaphthalene, bicyclo[2.2.1]heptadiene, bicyclo[4.3.0]nonadiene, dicyclopentadiene, hexahydroanthracene and

5 spiro[4.5]decadiene which may be substituted by one or more arbitrary substituents.

Any one or more carbon atoms of the compound having an alicyclic structure may be replaced with a hetero atom selected from nitrogen, oxygen and sulfur.

10 From the viewpoint of printing durability, the group R^1 is preferably a monovalent hydrocarbon group having a 5- to 8-membered monocyclic aliphatic hydrocarbon group, a condensed polycyclic aliphatic hydrocarbon group or an ensemble of aliphatic hydrocarbon rings.

15 As the substituent on R^1 , monovalent non-metallic atom groups other than hydrogen are typical such as a halogen atom (-F, -Br, -Cl or -I), a hydroxyl group, an alkoxyl group, an aryloxy group, a mercapto group, an alkylthio group, an arylthio group, an alkyldithio group, an aryldithio group, an amino group,

20 an N-alkylamino group, an N-alkyl-N-aryl amino group, an acyloxy group, a carbamoyloxy group, an N-alkylcarbamoyloxy group, an N-arylcarbamoyloxy group, an N,N-dialkylcarbamoyloxy group, an N,N-diarylcarbamoyloxy group, an

25 N-alkyl-N-arylcarbamoyloxy group, an alkylsulfoxy group, an arylsulfoxy group, an acylthio group, an acylamino group, an

N-alkylacrylamino group, an N-arylacrylamino group, an ureido
 group, an N'-alkylureido group, an N',N'-dialkylureido group,
 an N'-arylureido group, N',N'-diarylureido group,
 N'-alkyl-N'-arylureido group, an N-alkylureido group, an
 5 N-arylureido group, an N'-alkyl-N-alkylureido group, an
 N'-alkyl-N-arylureido group, an N', N'-dialkyl-N-alkylureido
 group, N',N'-dialkyl-N-arylureido group, an
 N'-aryl-N-alkylureido group, an N'-aryl-N-arylureido group,
 an N',N'-diaryl-N-alkylureido group; an
 10 N',N'-diaryl-N-arylureido group, an
 N'-alkyl-N'-aryl-N-alkylureido group, an
 N'-alkyl-N'-aryl-N-arylureido group, an alkoxycarbonylamino
 group, aryloxycarbonylamino group, an
 N-alkyl-N-alkoxycarbonylamino group, an
 15 N-alkyl-N-aryloxycabonylamino group, an
 N-aryl-N-alkoxycarbonylamino group, an
 N-aryl-N-aryloxycarbonylamino group, a formyl group, an acyl
 group, a carboxyl group and the conjugate base group thereof,
 an alkoxycarbonyl group, an aryloxycarbonyl group, a carbonyl
 20 group, an N-alkylcarbamoyle group, an N,N-dialkylcarbamoyle
 group, an N-arylcarbamoyle group, an N,N-diarylcarbamoyle group,
 an N-alkyl-N-arylcarbamoyle group, an alkylsulfinyl group, an
 arylsulfinyl group, an alkylsulfonyl group, an arylsulfonyl
 group, a sulfo group ($-SO_3H$) and the conjugate base group thereof,
 25 an alkoxysulfonyl group, an aryloxysulfonyl group, a

sulfinamoyl group, an N-alkylsulfinamoyl group, an
 N,N-dialkylsulfinamoyl group, an N-arylsulfinamoyl group, an
 N,N-diarylsulfinamoyl group, an N-alkyl-N-arylsulfinamoyl
 group, a sulfamoyl group, an N-alkylsulfamoyl group, an
 5 N,N-dialkylsulfamoyl group, an N-arylsulfamoyl group, an
 N,N-diarylsulfamoyl group, an N-alkyl-N-arylsulfamoyl group,
 an N-acylsulfamoyl group and the conjugate base group thereof,
 an N-alkylsulfonylsulfamoyl group $[-SO_2NHSO_2(alkyl)]$ and the
 conjugate base group thereof, an N-arylsulfonylsulfamoyl group
 10 $[-SO_2NHSO_2(aryl)]$ and the conjugate base group thereof, an
 N-alkylsulfonylcarbamoyl group $[-CONHSO_2(alkyl)]$ and the
 conjugate base group thereof, an N-arylsulfonylcarbamoyl group
 $[-CONHSO_2(aryl)]$ and the conjugate base group thereof, an
 alkoxysilyl group $[-Si(O-alkyl)_3]$, an aryloxysilyl group
 15 $[-Si(O-aryl)_3]$, a hydroxysilyl group $[-Si(OH)_3]$ and the
 conjugate base group thereof, a phosphono group $(-PO_3H_2)$ and
 the conjugate base group thereof, a dialkylphosphono group
 $[-PO_3(alkyl)_2]$, a diarylphosphono group $[-PO_3(aryl)_2]$, an
 alkylarylphosphono group $[-PO_3(alkyl)(aryl)]$, a
 20 monoalkylphosphono group $[-PO_3H(alkyl)]$ and the conjugate base
 group thereof, a monoarylphosphono group $[-PO_3H(aryl)]$ and the
 conjugate base group thereof, a phosphonoxy group $(-OPO_3H_2)$ and
 the conjugate base group thereof, a dialkylphosphonoxy group
 $[-OPO_3(alkyl)_2]$, a diarylphosphonoxy group $[-OPO_3(aryl)_2]$, an
 25 alkylarylphosphonoxy group $[-OPO_3H(alkyl)(aryl)]$, a













09985872-110601
TOP SECRET
monoalkylphosphonoxy group $[-OPO_3H(alkyl)]$ and the conjugate
base group thereof, a monoarylphosphonoxy group $[-OPO_3H(aryl)]$
and the conjugate base group thereof, a cyano group, a nitro
group, a dialkylboryl group $[-B(alkyl)_2]$, a diarylboryl group
5 $[-B(aryl)_2]$, an alkylarylboron group $[-B(alkyl)(aryl)]$, a
dihydroxyboryl group $[-B(OH)_2]$ and the conjugate base group
thereof, an alkylhydroxyboryl group $[-B(alkyl)(OH)]$ and the
conjugate base group thereof, an arylhydroxyboryl group
 $[-B(aryl)(OH)]$ and the conjugate base group thereof, an alkyl
10 group, an aryl group, and alkenyl group and an alkynyl group.

Preferable substituents include a halogen atom, an alkyl
group, an alkoxy group, an aryloxy group, an aryl group, an
alkenyl group, and an alkynyl group. If possible, these
substituents may be bonded to each other to form a ring. These
15 substituents may be further substituted.

The modified polyvinyl alcohol resin binder having a
constituent component represented by the formula (II) may have
two or more R^1 's. However, one R^1 is preferably used from the
standpoint of ease of synthesis.

20 Specific examples of the structure represented by the
formula (II) will be given below.

09065872-10601




09085876-110601

The polyvinyl alcohol resin binder modified with an acetal skeleton having an alicyclic structure of the invention preferably has an acid group to render itself alkali-developable.

5 The content of the acid group can be arbitrarily predetermined depending on the design of the photosensitive layer or the formulation of the developer. It is preferably from 0.5 to 4.0 meq/g, more preferably from 1.0 to 3.0 meq/g as calculated in terms of acid value determined by the titration with NaOH.

10 The polyvinyl alcohol resin binder having an acid group modified with an acetal skeleton having an alicyclic structure of the invention is not specifically limited. In practice, however, one having a constituent unit represented by the following formula (III) may be used.

15



20 wherein R³ represents a C₁-C₃₀ divalent hydrocarbon group which may have substituents; and A represents an acid group.


Examples of the C₁-C₃₀ divalent hydrocarbon group which may have substituents as R³ include alkylene group, arylene group, alkenylene group, and alkynylene group. Specific
25 examples of these groups include divalent hydrocarbon group

obtained by eliminating one hydrogen atom attached to arbitrary carbon atoms of the monovalent hydrocarbon group listed as specific example of R^1 in the formula (II).

Examples of the substituents on R^3 include those on R^1 in the formula (II).

From the standpoint of view, R^3 preferably has an alicyclic structure in its structure.













The acid group represented by A is not specifically limited. In practice, however, an acid group having an acid dissociation constant (pKa) of not greater than 7 is preferred. More preferably, $-\text{COOH}$, $-\text{SO}_3\text{H}$, $-\text{OSO}_3\text{H}$, $-\text{PO}_3\text{H}_2$, $-\text{OPO}_3\text{H}_2$, $-\text{CONHSO}_2-$, and $-\text{SO}_2\text{NHSO}_2-$ are used. In particular, a structure having $-\text{COOH}$ represented by the following formula (IV) is preferred.















20 wherein R^3 is as defined in the formula (III).

The modified polyvinyl alcohol resin binder having a constituent component represented by the formula (III) or (IV) may have two or more constituent components containing different R^3 's. However, one R^3 is preferably contained from the standpoint of ease of synthesis.


Specific examples of the structure represented by the
formula (IV) will be given below.



09985872 310601



An even more desirable example of the polyvinyl alcohol resin binder modified with an acetal skeleton having an alicyclic structure of the invention is one represented by the following
 5 formula (V).

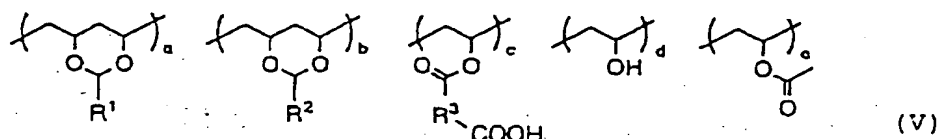

10 wherein R^1 and R^3 are as defined in the formulae (II) to (IV); R^2 represents a C_1 - C_{30} monovalent hydrocarbon group which may have substituents; and the suffixes a, b, c, d and e represent an integer of from 1 to 99, from 0 to 70, from 1 to 99, from 0 to 98 and from 0 to 30, respectively, with the proviso that
 15 the sum of a, b, c, d and e is 100.

Examples of the C_1 - C_{30} monovalent hydrocarbon group which may have substituents represented by R^2 include alkyl group, aryl group, alkenyl group and alkynyl group which may have substituents. However, R^2 doesn't contain an alicyclic
 20 structure.

Specific examples of the alkyl group include C_1 - C_{10} straight-chain or branched alkyl group such as methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, isopropyl, isobutyl, sec-butyl, tert-butyl, isopentyl,
 25 neopentyl, 1-methylbutyl and isohexyl.

Specific examples of the aryl group represented by R^2 include C_1 - C_{10} aryl group such as phenyl, naphthyl and indenyl, and C_1 - C_{10} heteroaryl group having one hetero atom selected from the group consisting of nitrogen atom, oxygen atom and sulfur atom such as furyl, chenyl, pyrrolyl, pyridyl and quinolyl.

Specific examples of the alkenyl group include C_1 - C_{10} straight-chain or branched alkenyl group such as vinyl, 1-propenyl, 1-butenyl and 1-methyl-1-propenyl.

Specific examples of the alkynyl group include C_1 - C_{10} alkynyl group such as ethynyl, 1-propynyl, 1-butyryl and 1-octinyl.

Examples of the substituents on R^2 include those described with reference to R^1 in the formula (II).

The modified polyvinyl alcohol resin binder represented by the formula (V) may have two or more structures having different R^2 's. In this case, the suffix b represents the total of b of the various structures. One R^2 is preferably contained from the standpoint of ease of synthesis.

The modified polyvinyl alcohol resin binder represented by the formula (V) may have two or more different R^1 's. In this case, the suffix a represents the total of a of the various structures. One R^1 is preferably contained from the standpoint of ease of synthesis.

The suffixes a, b, c, d and e represent an integer of from 1 to 99, from 0 to 70, from 1 to 99, from 0 to 98 and from

09985872-110601

0 to 30, respectively, with the proviso that the sum of a, b, c, d and e is 100. The polymer composition ratio represented by a, b, c, d and e may be arbitrarily predetermined by the design of the photosensitive layer or the structure of R^1 , R^2 and R^3 . From the standpoint of printing durability, the suffix a is preferably from 20 to 90, more preferably from 30 to 80. Similarly, from the standpoint of printing durability, the suffix b is preferably from 0 to 50, more preferably from 0 to 30. From the standpoint of developability, the suffix c is preferably from 5 to 60, more preferably from 10 to 50. From the standpoint of printing durability, the suffix d is preferably from 0 to 40, more preferably from 0 to 20. Further, the value of e, which determines the saponification degree of the polyvinyl alcohol as starting material, is preferably from 0 to 20, more preferably from 0 to 10 from the standpoint of ease in imparting functions to the binder.









Specific examples of the structure containing R^1 , R^2 and R^3 in the formula (IV) will be given below, but the present invention should not be construed as being limited thereto.

Specific examples of the structure containing R^1 include those described with reference to the structure represented by the formula (II).

Specific examples of the structure containing R^3 include those described with reference to the structure represented by the formula (IV).

Specific examples of the structure containing R² include
the following compounds:

09585872 110601



anhydride, 2-phenylglutaric anhydride,
 3,5-diacetyltetrahydropyran-2,4,6-trione, diglycolic
 anhydride, 3-oxabicyclo[3.1.0]hexane-2,4-dione,
 cyclohexanedicarboxylic anhydride,
 5 hexahydro-4-methylphthalic anhydride,
 1,2,3,6-tetrahydrophthalic anhydride,
 3,4,5,6-tetrahydrophthalic anhydride,
 5-norbornene-2,3-dicarboxylic anhydride,
 bicyclo[2.2.2]octo-5-ene-2,3-dicarboxylic anhydride,
 10 cantharidin, 3,6-epoxy-1,2,3,6-tetrahydrophthalic anhydride,
 1-cyclopentene-1,2-dicarboxylic anhydride,
 1,4,5,6,7,7-hexachloro-5-norbornene-2,3-dicarboxylic
 anhydride, phthalic anhydride, isacotinic anhydride,
 homophthalic anhydride, 4-methylphthalic anhydride,
 15 3,6-difluorophthalic anhydride, 3-hydroxyphthalic anhydride,
 1,2,4-benzenetricarboxylic anhydride, 3-nitrophthalic
 anhydride, diphenic anhydride, 1,8-naphthalic anhydride,
 4-amino-naphthalic anhydride, and dipotassium
 4-amino-3,6-disulfo-1,8-naphthalic anhydride.

20 The molecular weight of the polyvinyl alcohol resin binder
 modified with an acetal skeleton having an alicyclic structure
 of the invention is properly predetermined from the standpoint
 of image forming properties and printing durability. In general,
 the modified polyvinyl alcohol resin binder having a raised
 25 molecular weight exhibits an improved printing durability but

09985872 110601

deteriorated image forming properties. On the contrary, the modified polyvinyl alcohol resin binder having a decreased molecular weight exhibits improved image forming properties but deteriorated printing durability. The molecular weight of the modified polyvinyl alcohol resin binder is preferably from 2,000 to 1,000,000, more preferably from 5,000 to 500,000, even more preferably from 10,000 to 200,000.

The polyvinyl alcohol resin binder modified with an acetal skeleton having an alicyclic structure of the invention may be used singly. Alternatively, a plurality of these polyvinyl alcohol resin binders may be used in combination. Further, the polyvinyl alcohol resin binder modified with an acetal skeleton having an alicyclic structure of the invention may be used in admixture with one or more conventionally known polymer binders. The amount of polymer binders to be added to the modified polyvinyl alcohol resin binder is from 1 to 60% by weight, preferably from 1 to 40% by weight, more preferably from 1 to 20% by weight based on the total weight of the polymer binder. As the polymer binder to be added there may be used any conventionally known polymer binder without any restriction. Specific preferred examples of such a polymer binder include acryl main chain binder, urethane binder, and acetal-modified polyvinyl alcohol resin (butyral resin), which are often used in the art.

Next, ingredients for the photosensitive layer except the polymer binder will be described.

098587-110601
The photosensitive ingredient for image formation and used in the photosensitive layer of the lithographic printing plate of the invention may be of either positive type or negative type, but negative type photosensitive ingredients are more suited for the invention. Although such negative type photosensitive systems include a combination of an agent generating an acid by light or heat with a compound capable of undergoing an acid-catalyzed cross-linking reaction, and a combination of a photo- or heat-polymerization initiator with a compound having an ethylenically unsaturated bond capable of radical addition polymerization, particularly preferable photosensitive layers are photo- or heat-polymerizable photosensitive ones containing at least a photo- or heat-polymerization initiator and a compound having an ethylenically unsaturated bond capable of radical addition polymerization.

Moreover, the photosensitive lithographic printing plate of the invention is specially suited for the plate-making by a direct imaging using a laser with an emission wavelength of from 300 to 1,200 nm, and achieves a higher printing durability than the conventional lithographic plates.

[Photo- or Heat-polymerizable Negative Type Photosensitive Layer]

09985872-10601

The particularly preferable photosensitive layer for the photosensitive lithographic printing plate of the invention contains, as its essential ingredients, one of a polyurethane resin binder associated with the invention and a polyvinyl alcohol resin binder modified with an acetal skeleton having an alicyclic structure, a photo- or heat-polymerization initiator and an ethylenically unsaturated compound capable of addition polymerization (hereinafter referred to as addition polymerizable compound). To the photosensitive layer of this type, may be added a co-sensitizer, a coloring agent, a plasticizer, a polymerization inhibitor, and other additives.

15 [Addition Polymerizable Compound]

The addition polymerizable compound used for the photo- or heat-polymerizable negative type photosensitive layer and having at least one ethylenically unsaturated double bond is selected from compounds having at least one, preferably two or more, terminal ethylenically unsaturated bonds. Such compounds, which are well known in the related industrial fields, can be applied to the invention without any special restriction. Those compounds can take chemical forms such as monomer, pre-polymer, i.e., dimer, trimer and oligomer, mixtures as well as copolymers thereof. Examples of the monomer and the

0985872 14601

copolymer thereof include an unsaturated carboxylic acid (e.g., acrylic acid, methacrylic acid, itaconic acid, crotonic acid, isocrotonic acid or maleic acid), the ester and amide of such carboxylic acid, among which preferable compounds are the ester of an unsaturated carboxylic acid with an aliphatic polyvalent alcohol, and the amide of an unsaturated carboxylic acid with an aliphatic polyvalent amine compound. Also, the addition reaction product of an unsaturated carboxylic acid ester or amide both having a nucleophilic substituent such as a hydroxyl group, amino group or a mercapto group with a mono- or poly-functional isocyanate or epoxide, or the dehydrating condensation reaction product of an unsaturated carboxylic acid ester or amide both having a nucleophilic substituent such as a hydroxyl group, amino group or a mercapto group with a mono- or poly-functional carboxylic acid can be preferably used. Further, the product obtained by the addition reaction between an unsaturated carboxylic acid ester or amide having an electrophilic substituent such as an isocyanate group or an epoxy group and a mono- or poly-functional alcohol, amine or thiol, and one obtained by the substitution reaction using an unsaturated carboxylic acid ester or amide with a mono- or poly-functional alcohol, amine or thiol can be preferably used. As still other examples, the products obtained by similar reactions whereby the unsaturated carboxylic acid is replaced to an unsaturated phosphonic acid, styrene or vinyl ether are

also useful.

Specific examples of the monomer in the form of the ester of an aliphatic polyvalent alcohol with an unsaturated carboxylic acid include acrylic acid esters such as ethylene glycol diacrylate, triethylene glycol diacrylate, 1,3-butanediol diacrylate, tetramethylene glycol diacrylate, propylene glycol diacrylate, neopentyl glycol diacrylate, trimethylolpropane triacrylate, trimethylolpropane tri(acryloyloxypropyl) ether, trimethylolethane triacrylate, hexanediol diacrylate, 1,4-cyclohexanediol diacrylate, tetraethylene glycol diacrylate, pentaerythritol diacrylate, pentaerythritol triacrylate, pentaerythritol tetraacrylate, dipentaerythritol diacrylate, dipentaerythritol hexaacrylate, sorbitol triacrylate, sorbitol tetraacrylate, sorbitol pentaacrylate, sorbitol hexaacrylate, tri(acryloyloxyethyl) isocyanurate, and polyester acrylate oligomers; methacrylic acid esters such as tetramethylene glycol dimethacrylate, triethylene glycol dimethacrylate, neopentyl glycol dimethacrylate, trimethylolpropane trimethacrylate, trimethylolethane trimethacrylate, ethylene glycol dimethacrylate, 1,3-butanediol dimethacrylate, hexanediol dimethacrylate, pentaerythritol dimethacrylate, pentaerythritol trimethacrylate, pentaerythritol tetramethacrylate, dipentaerythritol dimethacrylate, dipentaerythritol hexamethacrylate, sorbitol trimethacrylate,

sorbitol tetramethacrylate,

bis[p-(3-methacryloxy-2-hydroxypropoxy)phenyl]dimethylmethane, and bis[p-(methacryloxyethoxy)phenyl]dimethylmethane;

itaconic acid esters such as ethylene glycol diitaconate,

5 propylene glycol diitaconate, 1,3-butanediol diitaconate,

1,4-butanediol diitaconate, tetramethylene glycol diitaconate,

pentaerythritol diitaconate, and sorbitol tetrataconate;

crotonic acid esters such as ethylene glycol dicrotonate,

tetramethylene glycol dicrotonate, pentaerythritol

10 dicrotonate, and sorbitol tetracrotonate;

isocrotonic acid esters such as ethylene glycol diisocrotonate,

pentaerythritol diisocrotonate, and sorbitol

tetraisocrotonate;

maleic acid esters such as ethylene glycol dimaleate,

15 triethylene glycol dimaleate, pentaerythritol dimaleate, and

sorbitol tetramaleate;

and other esters such as esters of aliphatic alcohols described

in Japanese Patent Publication Nos. 27926/1981 and 47334/1986

and Japanese Patent Laid-Open No. 196231/1983; those having

20 an aromatic back-bone structure as described in Japanese Patent

Laid-Open Nos. 5240/1984, 5241/1984 and 226149/1990; and those

containing an amino group as described in Japanese Patent

Laid-Open No. 165613/1989. All of these can be preferably used

in the invention.

25 The ester monomers enumerated heretofore may be used as

mixtures thereof.

Specific examples of the amide obtained from an aliphatic polyvalent amine compound and an unsaturated carboxylic acid include methylenebis-acrylamide,

5 methylenebis-methacrylamide,

1,6-hexamethylenebis-acrylamide,

1,6-hexamethylenebis-methacrylamide,

diethylenetriaminetrisacrylamide, xylylenebisacrylamide, and xylylenebismethacrylamide.

10 Other preferable amide monomers include those having a cyclohexylene structure and described in Japanese Patent Publication No. 21726/1979.

Moreover, urethane-type addition polymerizable compounds obtained by the addition reaction between an
15 isocyanate group and a hydroxyl group are suited for use in the invention. Specific examples thereof include, for example, vinyl urethane compounds having at least 2 polymerizable vinyl groups in a molecule by adding a hydroxyl group-containing vinyl monomer represented by the following formula (VII) to a
20 polyisocyanate compound having at least 2 isocyanate groups in a molecule as described in Japanese Patent Publication No. 41708/1973.



In the above formula, R^4 and R^5 each represents H or CH_3 .

25 Furthermore, the urethane acrylates described in Japanese

Patent Laid-Open No. 37193/1976, Japanese Patent Publication Nos. 32293/1990 and 16765/1990, and the urethane compounds having an ethylene oxide-based backbone as described in Japanese Patent Publication Nos. 49860/1983, 17654/1981, 39417/1987 and 5 39418/1987 can be preferably used.

Also, photo-polymerizable compositions exhibiting a very high photographic speed can be obtained by using an addition polymerizable compound having an amino structure or a sulfide structure in the molecule as described in Japanese Patent 10 Laid-Open Nos. 277653/1988, 260909/1988 and 105238/1989.

Still other examples of preferred esters include the polyester acrylates described in Japanese Patent Laid-Open No. 64183/1973 and Japanese Patent Publication Nos. 43191/1974 and 30490/1977, and polyfunctional acrylates or methacrylates such 15 as epoxy acrylates obtained by reacting an epoxy resin with (meth)acrylic acid. The specific unsaturated compounds described in Japanese Patent Publication Nos. 43946/1971, 40337/1989 and 40336/1989, and the vinylsulfonic acid derivatives described in Japanese Patent Laid-Open No. 20 25493/1990 can also be used. In some cases, the perfluoroalkyl group-containing structure given in Japanese Patent Laid-Open No. 22048/1986 is preferably used, too. Further, the photo-crosslinkable monomers and oligomers described in *The Journal of the Adhesion Society of Japan*, 20 (7), pp. 300 to 25 308 (1984) are applicable to the invention.

Details on how these addition polymerizable compounds are used including molecular structure, individual or joint usage thereof, addition level, etc. may be arbitrarily fixed depending on the performance design of the final product as

5 a negative type photosensitive lithographic printing plate. For example, the following viewpoints are taken into consideration for the determination of the use conditions. As for photographic speed, larger numbers of unsaturated groups contained in one molecule are better, and in most cases bi-

10 or higher poly-functional compounds are selected. From the viewpoint of the mechanical strength of image areas, i.e., cross-linked areas, tri- or higher poly-functional compounds are preferred. It is further effective to control both of photographic speed and mechanical strength by jointly using

15 plural compounds of different functionalities and having different polymerizable groups (e.g., acrylic acid esters, methacrylic acid esters, styrene and its derivatives and vinyl ether compounds). Compounds of a large molecular weight or a highly hydrophobic nature are desirable in the photographic

20 speed and mechanical strength as a film, on the other hand, however, are sometimes not preferred with regard to the development speed or the tendency of separation in the developer. The type and using method of the addition polymerizable compound plays a key role on the compatibility with and the dispersion

25 stability of other ingredients such as the binder polymer,

polymerization initiator, or coloring agent included in the photosensitive layer. To improve compatibility, use of a low purity compound or two or more kinds of materials are effective in some cases.

5 Some specific structures need be selected for the purpose of enhancing the adhesion to the support or an overcoat to be described later. Higher mixed ratios of the addition polymerizable compound in the photosensitive layer are generally preferred to raise the photographic speed, but
10 excessively high ratios cause problems of an undesirable phase separation, manufacturing troubles due to the tackiness of the photosensitive layer (e.g., failures derived from the transfer or adhesion of some ingredients of the photosensitive layer), or deposit formation in the developer. By considering these
15 aspects, the addition polymerizable compound is used preferably in 5 to 80% by weight, more preferably 25 to 75% by weight of the non-volatile ingredients of the photosensitive layer. Only one kind or two or more of the addition polymerizable compound may be used. In the determination of the using conditions for
20 the addition polymerizable compound, factors such as the degree of polymerization suppression caused by oxygen, image resolution, fog formation, refractive index modification and surface tackiness are taken into account, and an appropriate molecular structure, formulation and added amount are selected
25 arbitrarily. In some instances, various layer structures as

well as coating processes including sub-coating and over-coating may be adopted.

[Photo- or heat-polymerization Initiator]

5 Various photo-polymerization initiators known in a number of patents and literatures can be appropriately used with consideration on the wavelength of the light source to be used. Two or more kinds of photo-polymerization initiators forming a photo-polymerization initiating system may be jointly used,
10 too.

In cases where the second harmonics of a blue semiconductor laser, an Ar laser or an infrared semiconductor laser, or an SHG-YAG laser is used as the light source, various photo-polymerization initiators (or initiating systems) have
15 been proposed, including the photo-reducible dyes such as, for example, rose bengale, eosin or erythrosine as described in USP No. 2,850,445, systems based on the combinations of a dye and an initiator such as, for example, a complex initiating system based on a dye and an amine (Japanese Patent Publication
20 No. 20189/1969), a system jointly using a hexaarylbiimidazole, a radical generator and a dye (Japanese Patent Publication No. 37377/1970), a system using a hexaarylbiimidazole and a p-dialkylaminobenzylidene ketone (Japanese Patent Publication No. 2528/1972 and Japanese Patent Laid-Open No. 155292/1979),
25 a system based on a cyclic cis- α -dicarbonyl compound and a dye

09985872-10601

(Japanese Patent Laid-Open No. 84183/1973), a system based on a cyclic triazine and a merocyanine dye (Japanese Patent Laid-Open No. 151024/1979), a system based on 3-ketocoumarin and an activator (Japanese Patent Laid-Open Nos. 112681/1977 and 15503/1983), a system with a biimidazole, a styrene derivative and a thiol (Japanese Patent Laid-Open Nos. 140203/1984), a system based on an organic peroxide and a dye (Japanese Patent Laid-Open Nos. 1504/1984, 140203/1984, 189340/1984 and 174203/1987, Japanese Patent Publication No. 1641/1987 and USP No. 4766055), a system based on a dye and an active halogen compound (Japanese Patent Laid-Open Nos. 1718105/1988, 258903/1988 and 264771/1991), a system based on a dye and a borate compound (Japanese Patent Laid-Open Nos. 143,044/1987, 150,242/1987, 13,140/1989, 13,141/1989, 13142/1989, 13,143/1989, 13,144/1989, 17,048/1989, 229,003/1989, 298,348/1989 and 138204/1989), a system based on a rhodanine ring-containing dye and a radical generator (Japanese Patent Laid-Open Nos. 179643/1990 and 244,050/1990), a system based on a titanocene and a 3-ketocoumarine dye (Japanese Patent Laid-Open No. 221110/1988), a system based on a titanocene, a xanthene dye and an ethylenically unsaturated compound which contains an addition polymerizable amino or urethane group (Japanese Patent Laid-Open Nos. 221958/1992 and 219,756/1994), a system based on a titanocene and a special merocyanine dye (Japanese Patent Laid-Open No. 295061/1994),

and a system based on a titanocene and a pyrazoline
ring-containing dye (Japanese Patent Laid-Open No.
334897/1996).

Particularly preferable photo-polymerization
5 initiators (initiating systems) for the photosensitive layer
of the negative type photosensitive lithographic printing plate
of the invention contain at least a titanocene.

Any of the titanocene compounds that can yield an active
radical with light irradiation in the presence of another
10 sensitizing dye can be used for the invention as the
photo-polymerization initiator (initiating system). The
known compounds described in, for example, Japanese Patent
Laid-Open Nos. 152396/1984, 151197/1986, 41483/1988,
41484/1988, 249/1990, 291/1990, 27393/1991, 12403/1991 and
15 41170/1994 can be appropriately selected for use.

More specifically, di-cyclopentadienyl-Ti-dichloride,
di-cyclopentadienyl-Ti-bis-phenyl,
di-cyclopentadienyl-Ti-bis-2,3,4,5,6-pentafluorophen-1-yl
(abbreviated as "T-1" hereinafter),
20 di-cyclopentadienyl-Ti-bis-2,3,5,6-tetrafluorophen-1-yl,
di-cyclopentadienyl-Ti-bis-2,4,6-trifluorophen-1-yl,
di-cyclopentadienyl-Ti-bis-2,6-difluorophen-1-yl,
di-cyclopentadienyl-Ti-bis-2,4-difluorophen-1-yl,
di-methylcyclopentadienyl-Ti-bis-2,3,4,5,6-pentafluorophen
25 -1-yl,

di-methylcyclopentadienyl-Ti-bis-2,3,5,6-tetrafluorophen-1-yl, di-methylcyclopentadienyl-Ti-bis-2,4-difluorophen-1-yl, bis(cyclopentadienyl)-bis(2,6-difluoro-3-(pyr-1-yl)phenyl) titanium (abbreviated as "T-2" hereinafter).

5 These titanocene compounds may be subjected to a variety of chemical modifications to further improve the characteristics of the photosensitive layer. Such modifications include, for example, attaching a sensitizing dye or a radical generating part such as an addition
10 polymerizable unsaturated compound and the like, introducing a hydrophilic part, introducing a substituent for the purposes of compatibility enhancement and suppressing crystalline deposit formation, and introducing a substituent or polymer formation for the purpose of improving adhesive properties.

15 Similarly to the case of the addition polymerizable compound mentioned hereinabove, details on how these titanocene compounds are used may be arbitrarily determined depending on the performance design of the final product as a negative type photosensitive lithographic printing plate. For example, by,
20 using two or more compounds, the compatibility in the photosensitive layer can be improved. Larger amounts of the photo-polymerization initiator such as titanocene compounds are advantageous for photographic speed; to secure a sufficiently high photographic speed, 0.5 to 80 parts by weight,
25 more preferably 1 to 50 parts by weight of the initiator are

used per 100 parts by weight of the non-volatile ingredient of the photosensitive layer. On the other hand, when the plate is to be handled under the illumination of a yellow or white light, the use amount of titanocene should be suppressed because
5 of fogging with an around 500 nm wavelength light. And, by combining other types of sensitizing dyes, the use amount of titanocene can be suppressed to 6 parts by weight or less, further 1.9 parts by weight or less, still further 1.4 parts by weight or less whereby still a sufficient speed can be achieved.

10 In cases where a laser emitting an IR light of from 760 to 1,200 nm is used as the exposing light source, an IR absorbing agent is essentially used in general. The IR absorbing agent acts to convert the absorbed IR light to heat. The heat generated by this mechanism thermally decomposes the radical generator
15 to yield a radical. The IR absorbing agent used in the invention comprises a dye or pigment which has an absorption maximum in the range of from 760 to 1200 nm.

Commercially available dyes and those known in the art as described in, for example, *Senryo Binran* (Dye Handbook),
20 (edited by The Society of Synthetic Organic Chemistry, Japan, published in 1970) can be used. Specifically, azo dyes, metal complex salt azo dyes, pyrazolone azo dyes, naphthoquinone dyes, anthraquinone dyes, phthalocyanine dyes, carbonium dyes, quinoneimine dyes, methine dyes, cyanine dyes, squarilium dyes,
25 pyrylium dyes and metal thiolate complex dyes are included.


09985872-110601
TOP SECRET

Preferable dyes include the cyanine dyes described in, for example, Japanese Patent Laid-Open Nos. 125246/1983, 84356/1984, 202829/1984 and 78787/1985, the methine dyes described in Japanese Patent Laid-Open Nos. 173696/1983, 5 181690/1983 and 194595/1983, the naphthoquinone dyes described in Japanese Patent Laid-Open Nos. 112793/1983, 224793/1983, 48187/1984, 73996/1984, 52940/1985 and 63744/1985, the squalirium dyes described in Japanese Patent Laid-Open No. 112792/1983, and the cyanine dyes described in Brit. Patent 10 No. 434,875.

Moreover, preferably used are the near IR absorbing sensitizers described in USP No. 5,156,938, the substituted arylbenzo(thio)pyrylium salts described in USP No. 3,881,924, the trimethinethiapyrylium salts given in Japanese Patent 15 Laid-Open No. 142645/1982 (USP No. 4,327,169), the pyrylium-related compounds given in Japanese Patent Laid-Open Nos. 181051/1983, 220143/1983, 41363/1984, 84248/1984, 84249/1984, 146063/1984 and 146061/1984, the cyanine dyes given in Japanese Patent Laid-Open No. 216146/1984, the 20 pentamethinethiopyrylium salts given in USP No. 4,283,475, and the pyrylium compounds given in Japanese Patent Publication Nos. 13514/1993 and 19702/1993.

Other preferable examples include the near infrared absorbing dyes defined by formulae (VI) and (VII) of USP No. 25 4,756,993.

Among the dyes enumerated hereinabove, particularly preferable ones are cyanine dyes, squalirium dyes, pyrylium salts and nickel thiolate complexes. Among these, cyanine dyes are more preferably used, and those represented by the following
 5 formula (VIII) are still more preferably used.

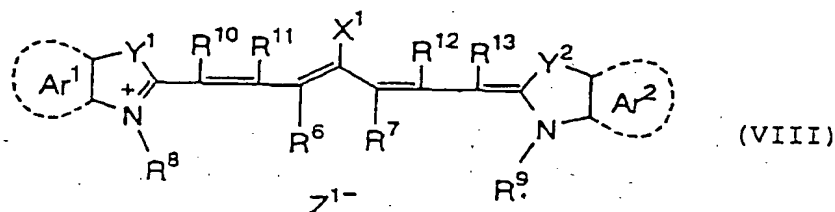

10








In formula (VIII), X^1 represents a halogen atom or X^2-L^1 , wherein X^2 represents an oxygen or sulfur atom, and L^1 represents a hydrocarbon group of 1 to 12 carbon atoms. R^6 and R^7 each represents independently a hydrocarbon group of 1 to 12 carbon
 15 atoms. For the storage stability of the coating mixture for the photosensitive layer, R^6 and R^7 each is preferably a hydrocarbon group of 2 or more carbon atoms, and moreover, R^6 and R^7 are more preferably bonded together to form a 5- or 6-membered ring.






20 Ar^1 and Ar^2 , which may be the same or different, each represents a substituted or unsubstituted aromatic hydrocarbon group. Preferable aromatic hydrocarbon groups include benzene and naphthalene rings. Preferable substituents include a hydrocarbon group of up to 12 carbon atoms, a halogen atom and
 25 an alkoxy group of up to 12 carbon atoms. Y^1 and Y^2 , which may

be the same or different, each represents a sulfur atom or a dialkylmethylene group of up to 12 carbon atoms. R^8 and R^9 , which may be the same or different, each represents a substituted or unsubstituted hydrocarbon group of up to 20 carbon atoms.

5 Preferable substituents include an alkoxy group, a carboxyl group and a sulfo group all of up to 12 carbon atoms. R^{10} , R^{11} , R^{12} and R^{13} , which may be the same or different, each represents a hydrogen atom or a hydrocarbon group of up to 12 carbon atoms. They should be preferably hydrogen atoms from the viewpoint
10 of raw material availability. Z^{1-} represents a counter anion. However, in the case where one of R^6 to R^{13} is substituted with a sulfo group, Z^{1-} is not necessary. Preferable ions for Z^{1-} include a halogen ion, perchlorate ion, tetrafluoroborate ion, hexafluorophosphate ion and a sulfonic acid ion from the
15 viewpoint of the storage stability of the coating mixture for the photosensitive layer. Among these, perchlorate ion, hexafluorophosphate ion and an arylsulfonic acid ion are particularly preferred.

Specific examples of the cyanine dye represented by
20 formula (VIII) for use in the invention include those described in Japanese Patent Application No. 310623/1999.

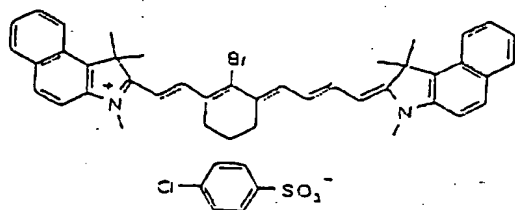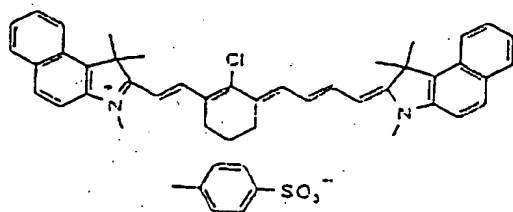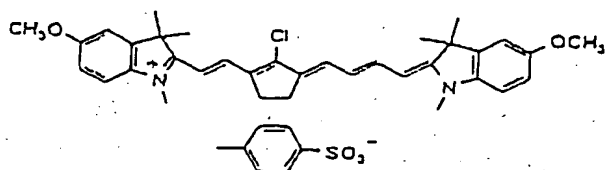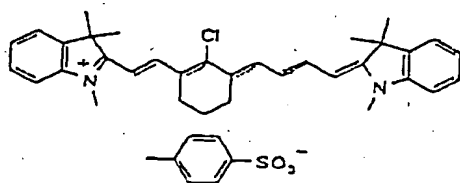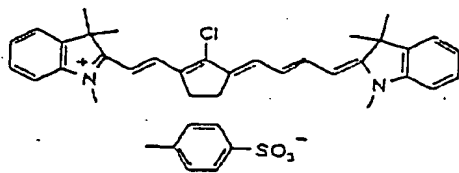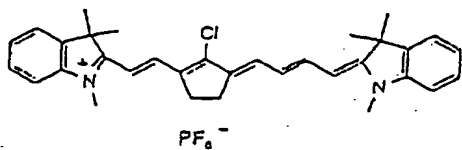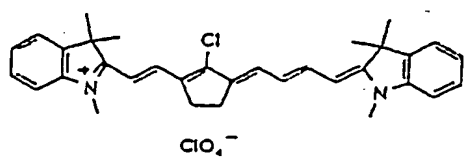

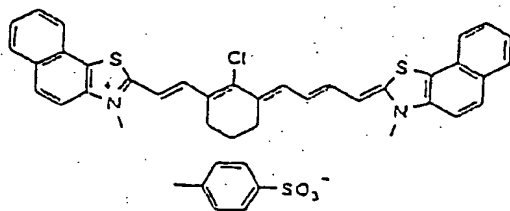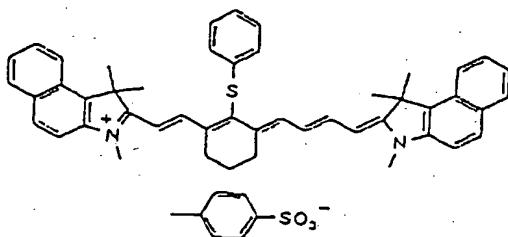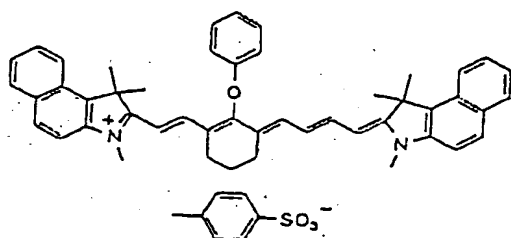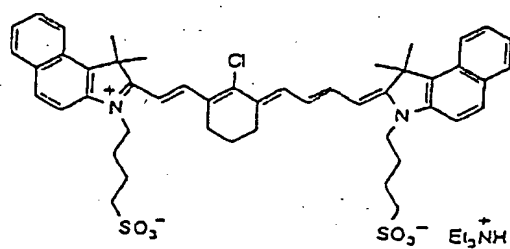

As the pigment used for the invention, commercially available ones and those listed in Color Index (C. I.) Handbook, and those described in *Saishin Ganryo Binran* (Updated Handbook on Pigment), edited by Nihon Ganryo Gijutu Kyokai (Pigment Technology Association of Japan) and published in 1977, *Saishin Ganryo Oyo Gijutu* (The Latest Pigment Application Technology) (CMC Books, 1986), and *Insatsu Inki Gijutu* (Printing Ink Technology) (CMC Books, 1984).

Applicable types of pigment include black, yellow, orange, brown, red, violet blue and green pigments, fluorescent pigments, metal powder pigments and polymer-grafted dyes. Specifically, insoluble azo pigments, azo lake pigments, condensed azo pigments, chelated azo pigments, phthalocyanine pigments, anthraquinone pigments, perylene and perynone pigments, thioindigo pigments, quinacrydone pigments, dioxazine pigments, isoindolinone pigments, quinophthalone pigments, lake pigments, azine pigments, nitroso pigments, nitro pigments, natural pigments, inorganic pigments and carbon black. Among these, carbon black is particularly preferred.

These pigments may be used without surface treatment, or may be subjected to a surface treatment such as surface coating with a resin or wax, deposition of a surfactant, and bonding a reactive substance (e.g., a silane coupling agent, an epoxy compound or a polyisocyanate) to the pigment surface. These

surface treatments are described in *Kinzoku Sekken no Saishitsu to Oyo* (Properties and Applications of Metal Soaps) (Saiwai Shobo), *Insatsu Inki Gijutu* (Printing Ink Technology) (CMC Books, 1984) and *Saishin Ganryo Oyo Gijutu* (The Latest Pigment Application Technology) (CMC Books, 1986).

The particle size of the pigment lies preferably in the range of from 0.01 to 10 μm , more preferably from 0.05 to 1 μm , and still more preferably from 0.1 to 1 μm . When the particle size falls below 0.01 μm , the pigment dispersion added to the coating mixture for the photosensitive layer exhibits a poor stability, while with sizes exceeding 10 μm the uniformity of the resulting photosensitive layer deteriorates.

Pigments can be dispersed by various methods well known in the fields of ink or toner manufacture. As the dispersing apparatus, an ultrasonic dispersion device, a sand mill, an attritor, a pearl mill, a super mill, a ball mill, an impeller, a disperser, a KD mill, a colloid mill, a dynatron, a three-roll mill or a pressure-aided kneader can be used. Details of dispersing methods are given in *Saishin Ganryo Oyo Gijutu* (The Latest Pigment Application Technology) (CMC Books, 1986).

Such an IR absorber may be incorporated not only in the photosensitive layer, but also to another layer including an over-coat or subbing layer. In any case, it is desirable that the optical density of the negative type photosensitive lithographic printing plate is from 0.1 to 3.0 at the absorption

09985872 "110601


maximum lying between the wavelengths of 760 and 1200 nm. With an optical density outside the cited range, the photographic speed tends to be low. Since the optical density is determined by the added amount of the IR absorber cited above and the photosensitive layer thickness, a preferable optical density can be achieved by controlling these two factors. Optical density can be measured by the conventional manner. For example, a photosensitive layer having a thickness after drying in the appropriate range as a lithographic printing plate is formed on a transparent or white support, and the density is measured with a transmission type densitometer, or a photosensitive layer is formed on a reflective support such as an aluminum sheet, and subjected to reflection density measurement.

A heat-decomposable radical generator means a compound that is used in combination with the IR absorber enumerated above and generates a radical when irradiated with an IR laser. Such a radical generator includes onium salts, triazine compounds containing a trihalomethyl group, peroxides, azo-type polymerization initiators, azide compounds and quinonediazides, among which onium salts are preferred due to their high sensitivity.

The onium salts that are preferably used in the invention as the radical polymerization initiator will be described. Preferable onium salts include iodonium salts, diazonium salts and sulfonium salts. In the invention, these onium salts act

as the initiator of radical polymerization not as an acid generator. The onium salts preferably used in the invention can be represented by the following formulae (IX) to (XI).


5 Formula (IX)



Formula (X)



Formula (XI)











In formula (IX), Ar^{11} and Ar^{12} each represents independently a substituted or unsubstituted aryl group of up to 20 carbon atoms including those of the substituent. In the case where this aryl group has a substituent, a halogen atom, a nitro group, an alkyl group of up to 12 carbon atoms, an alkoxy group of up to 12 carbon atoms and an aryloxy group of up to 12 carbon atoms are preferred as the substituent. Z^{11-} represents a counter ion chosen from the group comprising a halogen ion, perchlorate ion, tetrafluoroborate ion, hexafluorophosphate ion and a sulfonate ion. Among these, perchlorate ion, hexafluorophosphate ion and an arylsulfonate ion are preferred.

In formula (X), Ar^{21} represents a substituted or unsubstituted aryl group of up to 20 carbon atoms including








those of the substituent. Preferable substituents include a halogen atom, a nitro group, an alkyl group of up to 12 carbon atoms, an alkoxy group of up to 12 carbon atoms, an aryloxy group of up to 12 carbon atoms, an alkylamino group of up to 12 carbon atoms, an arylamino group of up to 12 carbon atoms and a diarylamino group of up to 12 carbon atoms. Z^{21-} represents a counter ion and has the same meaning as Z^{11-} .









In formula (XI), R^{31} , R^{32} and R^{33} , which may be the same or different, each represents a substituted or unsubstituted hydrocarbon group of up to 20 carbon atoms including the carbon atoms of the substituent. Preferable substituents include a halogen atom, a nitro group, an alkyl group of up to 12 carbon atoms, an alkoxy group of up to 12 carbon atoms and an aryloxy group of up to 12 carbon atoms. Z^{31-} represents a counter ion and has the same meaning as Z^{11-} .

Specific examples of the onium salt preferably used as the radical generator of the invention include those described in Japanese Patent Laid-Open No. 310623/1999.



09485372-110601





09955876 110501

The heat-decomposable radical generator used in the invention preferably has the maximum absorption wavelength shorter than 400 nm, more preferably shorter than 360 nm. By placing the absorption peak in a UV region, the negative type photosensitive lithographic printing plate can be handled under a white light.

Such a heat-decomposable radical generator is incorporated in the coating mixture for the photosensitive layer in an amount of 0.1 to 50% by weight, preferably 0.5 to 30% by weight, and particularly preferably from 1 to 20% by weight of the total weight of the non-volatile ingredient in the coating mixture. With an added amount below 0.1% by weight, the photographic speed is undesirably low, while an added amount exceeding 50% by weight causes stain formation in the non-image areas during printing. The radical generator to be used may comprise one type of material or two or more in combination. Although the heat decomposable radical generator may be incorporated in the same layer as other essential ingredients, or in another layer separately provided, the former method is preferred.

In addition to the essential ingredients described heretofore, the photo- or heat-polymerizable negative type photosensitive layer of the photosensitive lithographic printing plate of the invention may further contain other

ingredients suited for the product application and manufacturing process. Examples of such preferable additives will be shown hereinafter.

5 [Co-sensitizer]

By using a co-sensitizer for the photo-polymerizable photosensitive layer, the photographic speed of the photosensitive layer can be further enhanced. The working mechanism of the co-sensitizer, though not definitely clarified, may be probably based on the following chemical processes for most cases. That is, the co-sensitizer is assumed to react with various intermediate active species (such as a radical, a peroxide, an oxidizing agent or a reducing agent) formed in the photochemical reaction initiated by the light absorption of the photo-polymerization initiator (initiating system) followed by a subsequent addition polymerization reaction to generate a new active radical. The co-sensitizer can be roughly classified into (a) a compound capable of forming an active radical by reduction, (b) a compound capable of forming an active radical by oxidation, and (c) a compound reacting with a radical of low activity to convert it into a more active radical or acting as a chain transfer agent. However, commonly accepted views are not always established on which group each co-sensitizer belongs to.

25

(a) Compounds capable of forming an active radical by reduction

Compounds having a carbon-halogen bond: an active radical is considered to generate by the reductive cleavage of the carbon-halogen bond. Specifically, for example,

- 5 trihalomethyl-s-triazines and trihalomethyloxadiazoles can be preferably used.

Compounds having a nitrogen-nitrogen bond: an active radical is considered to generate by the reductive cleavage of the nitrogen-nitrogen bond. Specifically,

- 10 hexaarylbiimidazoles are preferably used.

Compounds having an oxygen-oxygen bond: an active radical is considered to generate by the reductive cleavage of the oxygen-oxygen bond. Specifically, for example, organic peroxides are preferably used.

- 15 Onium compounds: an active radical is considered to generate by the reductive cleavage of the carbon-hetero atom bond or the oxygen-nitrogen bond. Specifically, for example, diaryliodonium salts, triarylsulfonium salts, N-alkoxypyridium (azinium) salts are preferably used.

- 20 Ferrocene and iron arene complexes: they can form reductively an active radical.

(b) Compounds forming an active radical by oxidation

- Alkylate complexes: an active radical is considered to
25 generate by the oxidative cleavage of the carbon-hetero atom

bond. Specifically, for example, triarylalkylborates are preferably used.

Alkylamine compounds: an active radical is considered to generate by the oxidative cleavage of the C-X bond on the carbon atom adjacent to the nitrogen atom. X preferably represents a hydrogen atom, a carboxyl group, trimethylsilyl group and benzyl group. Specifically, for example, ethanolamine and derivatives thereof, N-phenylglycin and derivatives thereof, and N-trimethylsilylmethylaniline and derivatives thereof are preferably used.


Sulfur- or tin-containing compounds: the compounds resulting from the substitution of the nitrogen atom in the above-cited amine compounds to a sulfur or tin atom can form an active radical in a similar manner. Further, it is known that compounds having an S-S bond exhibit a sensitizing effect based on S-S cleavage.

α -Substituted methylcarbonyl compounds: an active radical can be generated by the oxidative cleavage of the carbonyl- α -carbon bond. The compounds in which the carbonyl group is converted to an oxime ether exhibit a similar function. Specifically, 2-alkyl-1-[4-(alkylthio)phenyl]-2-morpholinopronone-1 and related compounds, and the oxime ethers which result from the reaction of the above compounds with a hydroxylamine followed by the etherification of the N-OH can be used.

Sulfinic acid salts: these compounds can reductively yield an active radical. Specifically sodium arylsulfonates are included.

- 5 (c) Compounds which react with a radical to convert it into a more active radical or which act as a chain transfer agent: compounds having SH, PH, SiH or GeH in the molecule are used. These compounds donate hydrogen to a radical species of low activity to form another radical, or can form a radical
10 by deprotonation after oxidation. Specific examples include 2-mercaptobenzoimidazoles.

Specific examples of the various co-sensitizers enumerated heretofore are described in, for example, Japanese Patent Laid-Open No. 236913/1997 as the additives that are used
15 to enhance photographic speed. Some of the compounds are listed in the following, to which, however, those used in the photosensitive layer of the photosensitive lithographic printing plate of the invention are not limited at all.

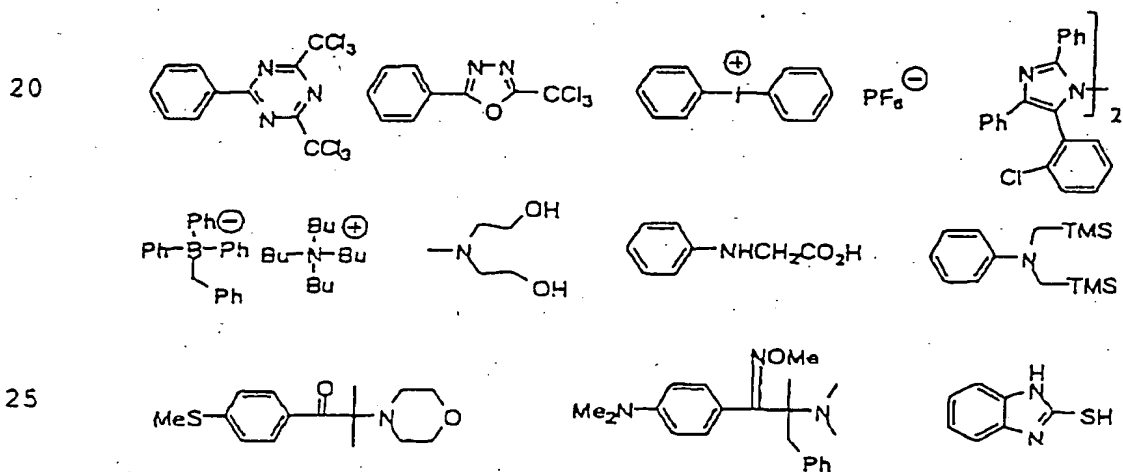

type photosensitive composition. Suitable heat

polymerization inhibitor include hydroquinone,

p-methoxyphenol, di-t-butyl-p-cresol, pyrogallol,

t-butylcatechol, benzoquinone,

5 4,4'-thiobis-(3-methyl-6-t-butylphenol),

2,2'-methylenebis(4-methyl-6-t-butylphenol), and the primary

cerium salt of N-nitrosophenylhydroxyamine. The addition

amount of the heat polymerization inhibitor is preferably from

about 0.01 to about 5% by weight of the amount of the non-volatile

10 ingredient of the composition. Depending on need, higher

aliphatic acid derivatives such as behenic acid or behenic acid

amide may be added whereby these additives are localized at

the surface of the photosensitive layer after drying to suppress

the polymerization inhibition caused by oxygen. Such higher

15 aliphatic acid derivatives are preferably added in about 0.5

to 10% by weight of the total amount of the non-volatile

ingredient of the composition.

[Coloring agent]-

20 The photosensitive layer of the photosensitive

lithographic printing plate of the invention may be incorporated

with a coloring agent such as a dye or pigment for the coloration

thereof. With this countermeasure, the so-called plate

inspection capability is improved which indicates the ease of

25 visual inspection of the printing plate after plate making or

09485872-110601
the adaptiveness to image density measuring apparatuses. Since most of dyes act to lower the photographic speed of the photo-polymerizable photosensitive layer, pigments are preferably used as a coloring agent. Specifically, pigments such as phthalocyanine and azo pigments, carbon black and titanium oxide, dyes such as ethyl violet, crystal violet, azo dyes, anthraquinone dyes and cyanine dyes can be used. Such a dye or pigment is preferably used in an amount of about 0.5% to about 5% by weight of the non-volatile ingredient of the composition.

[Other additives]

To further improve the physical properties of the cross-linked layer, various additives well known in the art may be incorporated including an inorganic filler, a plasticizer, and an oil-affinitizing agent which can enhance the ink-receptivity of the photosensitive layer surface.

Preferable plasticizers include, for example, dioctyl phthalate, didodecyl phthalate, triethyleneglycoldicaprilate, dimethyl glycol phthalate, tricresyl phosphate, dioctyl adipate, dibutyl sebacate, and triacetyl glycerin. The plasticiser can be incorporated in a content of 10% by weight or lower relative to the total weight of the polymer binder and the addition polymerizable compound.

Furthermore, with the purpose of enhancing the mechanical

strength of the layer (printing durability) as will be described hereinafter, a UV initiator and a thermal cross-linking agent may be incorporated, too. These additives enhance the effect of post baking or exposure after development.

5 To prepare the photosensitive layer by coating, the photopolymer composition for said layer is dissolved in a variety of organic solvents, and the resulting coating mixture is applied to the interlayer described above. Solvents used for that purpose include acetone, methyl ethyl ketone, cyclohexane,
10 ethyl acetate, ethylene dichloride, tetrahydrofuran, toluene, ethylene glycol monomethyl ether, ethylene glycol monoethyl ether, ethylene glycol dimethyl ether, propylene glycol monomethyl ether, propylene glycol monoethyl ether, acetylacetone, cyclohexanone, diacetone alcohol, ethylene
15 glycol monomethyl ether acetate, ethylene glycol ethyl ether acetate, ethylene glycol monoisopropyl ether, ethylene glycol monobutyl ether acetate, 3-methoxypropanol, methoxymethoxyethanol, diethylene glycol monomethyl ether, diethylene glycol monoethyl ether, diethylene glycol dimethyl
20 ether, diethylene glycol diethyl ether, propylene glycol monomethyl ether acetate, propylene glycol monoethyl ether acetate, 3-methoxypropyl acetate, N,N-dimethylformamide, dimethylsulfoxide, γ -butyrolactone, methyl lactate, and ethyl lactate. The solvent material can be used in pure form or as
25 a mixture. The solid content in the coating mixture is usually

2 to 50% by weight.

Since the coated amount of the photosensitive layer described heretofore mainly governs the photographic speed, the developability of the photosensitive layer, and the strength and the durability of the exposed layer, it should be appropriately determined depending on the application of the final product. With a too small coated amount, an insufficient printing durability results. On the other hand, with an excessively large coated amount, the photographic speed falls, thus undesirably expanding the exposure time and the developing time. The appropriate range of coated amount after drying, as the photosensitive lithographic printing plate used for scanning exposure, which is the main object of the invention, is from about 0.1 to about 10 g/m², more preferably from 0.5 to 5 g/m².

[Support]

As the support of the photosensitive lithographic printing plate of the invention, any hydrophilic support that is well known in the art and has been used for photosensitive lithographic printing plates can be used without any restriction. The support should preferably be in the form of highly dimensionally stable sheet: preferable specific materials include, for example, paper, paper laminated with a plastic (e.g., polyethylene, polypropylene or polystyrene),

09985672 110504
above comprising aluminum or aluminum alloys. The foreign elements included in such aluminum alloys include silicon, iron, manganese, copper, magnesium, chromium, zinc, bismuth, nickel and titanium. The content thereof is up to 10% by weight of the alloy. Though pure aluminum sheets are suited for the invention, those containing a scarce amount of foreign elements can also be used since perfectly purified aluminum is difficult to produce with the current smelting technology.

Hence, the composition of the aluminum sheet applicable to the invention is not specifically identified, but the conventionally known materials including, for example, JIS A 1050, JIS A 1100, JIS A 3103 and JIS A 3005 can be appropriately used. The thickness of the aluminum support for use in the invention lies in the rough range of from 0.1 to 0.6 mm. The thickness may be suitably adjusted depending on the size of the press machine, the size of the printing plate and user requests. These aluminum supports may be subjected to a surface treatment to be described later, if required and necessary. Self-evidently, supports free of surface treatments may be used.

[Surface graining]

In the surface graining processes, mechanical graining as disclosed in Japanese Patent Laid-Open No. 28893/1981, chemical etching and electrolytic graining are included. Besides usable are electrochemical graining wherein the surface

09985872-110601

is roughened electrochemically in an electrolytic solution containing hydrochloric or nitric acid, and a number of mechanical graining such as wire brush graining wherein the aluminum surface is scratched with metallic wires, ball graining wherein the aluminum surface is grained with polishing balls and an abradant, and brush graining wherein nylon brushes and an abradant are used for surface graining. These graining processes can be used separately or in combination.

Among those various processes, most effective one is the electrochemical graining conducted in an electrolytic solution containing hydrochloric or nitric acid. A suitable anode electric quantity lies in the range of 50 to 400 C/dm². More specifically, an ac and/or dc electrolysis is preferably conducted in an electrolytic solution containing 0.1 to 50% of hydrochloric or nitric acid at a temperature between 20 and 80°C, for 1 sec to 30 min with a current density of 100 to 400 C/dm².

The aluminum support thus surface-roughened may further be chemically etched with an acid or an alkali. Preferable etching agents include caustic soda, sodium carbonate, sodium aluminate, sodium metasilicate, sodium phosphate, potassium hydroxide and lithium hydroxide. Preferable ranges for the concentration and temperature are 1 to 50% and 20 to 100°C, respectively. An acid rinse is carried out to eliminate the smut remaining on the surface after etching. The acid to be

used includes nitric, sulfuric, phosphoric, chromic, hydrofluoric and borofluoric. As the desmutting treatment after the electrochemical graining process, the method described in Japanese Patent Laid-Open No. 12739/1988 and comprising bringing the sheet into contact with 15 to 65% by weight sulfuric acid at 50 to 90°C, and an alkali etching given in Japanese Patent Publication No. 28123/1973 are preferably adopted.

Any graining process may be used provided that the grained surface has a centerline average surface roughness Ra of 0.2 to 0.5 μm .

[Anodic oxidation]

The aluminum support thus treated and having an oxide layer is then subjected to an anodic oxidation. The anodizing treatment is conducted in an electrolytic solution containing, as the main ingredient, one or more of the aqueous solution of sulfuric acid, phosphoric acid, oxalic acid or boric acid/sodium borate appropriately combined. Self-evidently the electrolytic solution may contain those ingredients that are usually contained in the aluminum alloy sheet, the electrode, tap water or underground water. Further, secondary or tertiary components may be present in the electrolytic solution. Examples of such secondary or tertiary components include the ions of metals such as Na, K, Mg, Li, Ca, Ti, Al, V, Cr, Mn,

09085872 110601
Fe, Co, Ni, Cu and Zn and other cationic ions such as ammonium ion, and anionic ions such as nitrate ion, carbonate ion, chloride ion, phosphate ion, fluoride ion, sulfite ion, titanate ion, silicate ion and borate ion. The concentration thereof
5 is usually 0 to 10000 ppm. Though there is no restriction on the conditions of anodic oxidation, sheets are preferably subjected to a dc or an ac electrolysis with a process load of 30 to 500 g/liter under a treatment solution temperature of 10 to 70°C at a current density of 0.1 to 40 A/m². The thickness
10 of the oxide layer formed by such anodic oxidation usually lies in the range of 0.5 to 1.5 μm, preferably 0.5 to 1.0 μm.

It is essential to select the processing conditions so that the micro-pores formed in the oxide layer obtained by the anodic oxidation are of 5 to 10 nm diameter and that the pore
15 density lies in the range of from 8×10^{15} to 2×10^{16} /m² in number.

The surface of the support described heretofore is subjected to various water-receptivity enhancing treatments well known in the art. Particularly preferable treatments include those using a silicate or polyvinylphosphoric acid.
20 A hydrophilic coating is formed so as to have 2 to 40 mg/m², more preferably 4 to 30 mg/m² in terms of the deposited amount of elemental Si or P.

The deposited amount of such water-receptivity enhancing agent can be measured by X-ray fluorescence analysis.

25 The above-described water-receptivity enhancing

09985872-110601

treatment is conducted by immersing the aluminum support having the anodic oxidation layer in an alkali metal silicate or polyvinylphosphonic acid aqueous solution of 1 to 30% by weight concentration, preferably 2 to 15% by weight concentration, which shows a pH of 10 to 13 at 25°C, at a temperature between 15 and 80°C for 5 to 120 sec.

The alkali metal silicate used for such water-receptivity enhancing treatment includes sodium silicate, potassium silicate and lithium silicate. The hydroxide used to raise the pH of the aqueous alkali metal silicate solution includes sodium hydroxide, potassium hydroxide and lithium hydroxide.

To the solution used for the water-receptivity enhancing treatment may be incorporated an alkaline earth metal salt or the salt of a Group IVB metal. The alkaline earth metal salt includes nitrates such as potassium nitrate, strontium nitrate, magnesium nitrate and barium nitrate, and various water-soluble sulfates, chlorides, phosphates, acetates, oxalates and borates. The salt of a Group IVB metal includes titanium tetrachloride, titanium trichloride, potassium titanium fluoride, titanium potassium oxalate, titanium sulfate, titanium tetraiodide, zirconium oxychloride, zirconium dioxide, zirconium oxychloride and zirconium tetrachloride.

These alkaline earth metal salts or the salts of Group IVB metals may be used individually or in combination of two or more thereof. A preferable content of these metal salts

is from 0.01 to 10% by weight, and a more preferable content is from 0.05 to 5.0% by weight.

Alternatively, the electro-deposition of a silicate is also effective as described in USP No. 3,658,662. The surface treatment comprising the combination of the above-described anodic oxidation treatment and water-receptivity enhancing treatment, which are applied to the support subjected to the electrolytic graining described in Japanese Patent Publication No. 27481/1971, and Japanese Patent Laid-Open Nos. 58602/1977 and 30503/1977, are useful.

[Interlayer]

In the photosensitive lithographic printing plate of the invention, an interlayer may be provided between the photosensitive layer and the support for the purposes of adhesion improvement and stain prevention. Specific examples of such an interlayer are given in Japanese Patent Publication No. 7481/1975, Japanese Patent Laid-Open Nos. 71123/1976, 72104/1979, 101651/1984, 149491/1985, 232998/1986, 304441/1990, 56177/1991, 282637/1992, 16558/1993, 246171/1993, 341532/1993, 159983/1995, 314937/1995, 202025/1996, 320551/1996, 34104/1997, 236911/1997, 269593/1997, 69092/1998, 115931/1998, 161317/1998, 260536/1998, 282679/1998, 282682/1998, 84674/1999, 69092/1998, 115931/1998, 38635/1999, 38629/1999, 282645/1998, 301262/1998, 24277/1999, 109641/1999,

319600/1998, 84674/1999, 327152/1999 and 10292/2000, Japanese Patent Application Nos. 36377/1999, 165861/1999, 284091/1999 and 14697/2000.

5 [Protective layer]

In the photosensitive lithographic printing plate having a photo- or heat-polymerizable photosensitive layer as a preferable embodiment of the invention, it is desirable to provide a protective layer on the photosensitive layer cited
10 above in order to conduct image exposure in the air. The protective layer prevents the oxygen or a low molecular weight compound such as a basic material present in the air, both of which hinder the image forming reaction triggered by an exposure to the photosensitive layer mentioned above, from contaminating
15 in the photosensitive layer, thus enabling the photosensitive plate to be exposed in the air. Accordingly, the characteristics expected to such a protective layer include, in the first place, a low permeability of low molecular weight molecules such as oxygen, and further an easy removability during
20 development after image exposure. Various proposals have been already made on the protective layer as described in detail in USP No. 3,458,3111 and Japanese Patent Laid-Open No. 49729/1980.

As the material used for the protective layer,
25 water-soluble polymers with a relatively high degree of

05985872-110601

crystallinity are preferred. Specifically, water-soluble polymers such as poly(vinyl alcohol), polyvinylpyrrolidone, acid cellulose derivatives, gelatin, gum Arabic and poly(acrylic acid). To use poly(vinyl alcohol) as the principal ingredient of the protective layer gives the best result on the basic characteristics such as oxygen exclusion and removability during development. The poly(vinyl alcohol) to be used for the protective layer, may be partially substituted with an ester, ether or acetal so long as a sufficient amount of unsubstituted poly(vinyl alcohol) remains to secure the necessary degree of oxygen exclusion as well as water-solubility. Similarly, the poly(vinyl alcohol) may contain another copolymerized ingredient in part. Specific examples of poly(vinyl alcohol) include those in which 71 to 100% of the monomer units are hydrolyzed and which have a molecular weight of from 300 to 2400.

Specifically, the following products of Kuraray Corp., Ltd. are preferably used: PVA-105, PVA-110, PVA-117, PVA-117H, PVA-120, PVA-124, PVA-124H, PVA-CS, PVA-CST, PVA-HC, PVA-203, PVA-204, PVA-205, PVA-210, PVA-217, PVA-220, PVA-224, PVA-217EE, PVA-217E, PVA-220E, PCA-224E, PVA-405, PVA-420, PVA-613, and L-8.

The composition (selection of PVA and use of additives) and the coating weight of the protective layer are determined with consideration of, in addition to the degree of

09985372-110601

oxygen-exclusion and the removability during development, fog formation, adhesive property and anti-abrasion property. Generally speaking, the higher the degree of hydrolysis of PVA (i.e., the higher the content of unsubstituted vinyl alcohol unit in the protective layer) is, and the thicker the layer is, the higher the degree of oxygen-exclusion becomes, and therefore the product is desirable as regards photographic speed. However, when oxygen is excessively excluded, various problems arise: undesirable polymerization proceeds during manufacture or storage before use, or after image exposure, unwanted fog or fattening of a line image takes place. Besides, the adhesion of the protective layer to the image portion and the abrasion resistance are very important in plate handling. When a hydrophilic layer comprising a water-soluble polymer is superposed on the oleophilic photosensitive layer, layer separation tends to occur due to the lack of adhesive strength, and the area where the protective layer has been peeled off gives rise to an image defect due to the polymerization impediment by oxygen which leads to a poor cross-linking of the photosensitive layer. To solve the problem, various proposals have been made which aim to improve the adhesion of these two layers. For example, USP Nos. 292,501 and 44,563 disclose that a sufficient adhesion is achieved by forming a protective layer with a mixture comprising a hydrophilic polymer mainly consisting of PVA and 20 to 60% by weight of an acrylic

06965872-10601
29901-299990

emulsion or a water-insoluble vinylpyrrolidone-vinyl acetate copolymer on a photosensitive layer. To the protective layer for the invention, any known technique including the one cited above can be applied. Methods of coating such a protective layer are described in detail in, for example, USP No. 3,458,311 and Japanese Patent Laid-Open No. 49729/1980.

In the plate-making process with which a lithographic printing plate is produced from the photosensitive lithographic printing plate of the invention, the entire area of the photosensitive plate may be baked prior to or during exposure, or in the period between exposure and development, depending on need. Such baking operation brings about advantages such as promotion of the image forming reaction in the photosensitive layer, enhancement of photographic speed or printing durability, and stabilization of photographic speed. Moreover, it is effective to post-bake the plate or give a uniform exposure to the image obtained by development for the purposes of enhancing image strength and printing durability. Usually, mild heating conditions not exceeding 150°C are preferably adopted for pre-baking prior to development. When the baking temperature is too high, non-image areas tend to be fogged. In contrast, the post-baking condition is very harsh, using temperatures between 200 and 500°C. With a post-baking at too low temperatures, the image enhancing effect is not enough, while a too high temperature post-baking causes problems such

as the deterioration of the support and the thermal decomposition of the image area.

Without any restriction, various exposure methods known in the art can be used to expose the photosensitive lithographic printing plate of the invention. Preferably the wavelength of the light source to be used lies in the range of 300 to 1200 nm, and specifically various types of lasers can be used as the light source. Any of exposure mechanisms such as of inner drum type, outer drum type, or flat bed type can be used. The photosensitive composition of the photosensitive lithographic printing plate of the invention can be formulated so as to be soluble in neutral or weakly alkaline water with the use of highly water-soluble ingredients. When a photosensitive lithographic printing plate of such a composition is loaded on a press machine, image exposure and development can be performed on the machine.

As other exposure lights for the photosensitive lithographic printing plate of the invention, those emitted from a number of sources such as ultra-high, high, medium and low pressure mercury lamps, a carbon arc lamp, a xenon lamp, a metal halide lamp, various laser lamps, a fluorescent lamp, an incandescent lamp or the sun can be used.

The photosensitive lithographic printing plate of the invention is developed after image exposure.

The developer used for such development consists of

preferably an aqueous alkali solution of a pH up to 14, and more preferably an aqueous alkali solution of a pH of from 8 to 12 containing an anionic surfactant. For example, inorganic alkaline compounds such as sodium, potassium or ammonium tertiary phosphate, sodium, potassium or ammonium secondary phosphate, sodium, potassium or ammonium carbonate, sodium, potassium or ammonium bicarbonate, sodium, potassium or ammonium borate, sodium, potassium, ammonium or lithium hydroxide, and organic ones such as monomethylamine, dimethylamine, trimethylamine, monoethylamine, diethylamine, triethylamine, monoisopropylamine, diisopropylamine, triisopropylamine, n-butylamine, monoethanolamine, diethanolamine, triethanolamine, monoisopropanolamine, diisopropanolamine, ethylenimine, ethylenediamine, and pyridine can be used.

These alkaline compounds may be used individually or in combination of two or more thereof.

In developing the photosensitive lithographic printing plate of the invention, an anionic surfactant is incorporated in the developer in an amount of 1 to 20% by weight, preferably 3 to 10% by weight. With a smaller amount of the surfactant than the lower limit cited above, the development does not proceed well, while with a larger amount than the upper limit cited above, various problems arise such as insufficient image strength including printing durability, etc.

09985872-110601

Such anionic surfactants include, for example, sodium lauryl alcohol sulfate, ammonium lauryl alcohol sulfate, sodium octyl alcohol sulfate, sodium isopropyl naphthalenesulfonate, sodium isobutyl naphthalenesulfonate, sodium salt of

5 polyoxyethylene glycol mononaphthyl ether sulfonate ester, alkylarylsulfonic acid salts such as sodium dodecylbenzenesulfonate and sodium m-nitrobenzenesulfonate, higher alcohol sulfuric acid esters of 8 to 22 carbon atoms such as sodium alkyl secondary sulfate, aliphatic alcohol

10 phosphoric acid esters exemplified by the sodium salt of cetyl alcohol phosphate ester, the sulfonic acid salts of alkylamides exemplified by $C_{17}H_{33}CON(CH_3)CH_2CH_2SO_3Na$, and the sulfonic acid salts of dibasic aliphatic esters.

If required and necessary, an organic solvent miscible

15 with water such as benzyl alcohol may be added to the developer. As such an organic solvent, those having a solubility in water of about 10% by weight or lower are suited, and preferably selected from those having a solubility up to 5% by weight. Examples include 1-phenylethanol, 2-phenylethanol,

20 3-phenylpropanol, 1,4-phenylbutanol, 2,2-phenylbutanol, 1,2-phenoxyethanol, 2-benzyloxyethanol, o-methoxybenzyl alcohol, m-methoxybenzyl alcohol, p-methoxybenzyl alcohol, benzyl alcohol, cyclohexanol, 2-methylcyclohexanol, 4-methylcyclohexanol and 3-methylcyclohexanol. A preferable

25 range of the organic solvent content is from 1 to 5% by weight

based on the total weight of the working developer. This content is closely related to the use amount of the anionic surfactant; as the amount of the organic solvent increases, it is desirable to increase the use amount of the anionic surfactant. The reason is that, if a small amount of an anionic surfactant is used in combination with a large amount of an organic solvent, the organic solvent fails to dissolve in the developer thus making it difficult to secure good developing characteristics.

Still further, depending on need, other additives such as an anti-forming agent and a hard water softener may be added. As the examples of hard water softener, polyphosphate salts such as, for example, $\text{Na}_2\text{P}_2\text{O}_7$, $\text{Na}_5\text{P}_3\text{O}_{10}$, $\text{Na}_3\text{P}_3\text{O}_9$, $\text{Na}_2\text{O}_4\text{P}(\text{NaO}_3\text{P})\text{PO}_3\text{Na}_2$ or Calgon (sodium polymetaphosphate), aminopolycarboxylic acid salts such as, for example, ethylenediaminetetraacetic acid and the potassium or sodium salt thereof, diethylenetriaminepentaacetic acid and the potassium or sodium salt thereof, triethylenetriaminehexaacetic acid and the potassium or sodium salt thereof, hydroxyethylethylenediaminetriacetic acid and the potassium or sodium salt thereof, nitrilotriacetic acid and the potassium or sodium salt thereof, 1,2-diaminocyclohexanetetraacetic acid and the potassium or sodium salt thereof, 1,3-diamino-2-propanoltetraacetic acid and the potassium or sodium salt thereof, organic phosphonic acids and their salts such as 2-phosphonobutanetricarboxylic acid-1,2,4 and the

potassium or sodium salt thereof,

2-phosphonobutanetricarboxylic acid-2,3,4 and the potassium or sodium salt thereof, 1-phosphonoethanetricarboxylic acid-1,2,2 and the potassium or sodium salt thereof,

5 1-hydroxyethane-1,1-diphosphonic acid and the potassium or sodium salt thereof, and aminotri(methylenephosphonic acid) and the potassium or sodium salt thereof are included. The most appropriate amount of such a hard water softener, which depends on the hardness and quantity of hard water used, is
10 usually from 0.01 to 5% by weight, preferably from 0.01 to 0.5% by weight of the working developer.

In the case where the photosensitive lithographic printing plate is processed with an automatic processor, the developer is gradually exhausted corresponding to the processed
15 amount, thus the developing capability may be recovered by adding a replenisher or a fresh developer. It is preferable to adopt a replenishing method given in USP No. 4,882,246.

The developers given in Japanese Patent Laid-Open Nos. 26601/1975 and 54341/1983, and Japanese Patent Publication Nos.
20 39464/1981, 42860/1981 and 7427/1982 are also preferably used.

The photosensitive lithographic printing plate thus processed is subjected to a post-processing with a rinse water, a rinse liquid containing a surfactant, or a desensitizing liquid containing gum arabic or a starch derivative as described in
25 Japanese Patent Laid-Open Nos. 8002/1979, 115045/1980 and

58431/1984. As the post-processing for the photosensitive lithographic printing plate of the invention, various combinations of the processings cited above may be adopted.

A lithographic printing plate thus prepared is loaded
5 on an offset press machine to produce a large number of prints.

Conventionally known plate cleaners for PS plates including CL-1, CL-2, CP, CN-4, CN, CG-1, PC-1, SR, and IC, all being the products of Fuji Photo Film Co., Ltd. are used to remove the stains on the plate formed during printing.

10

EXAMPLES

The invention will be explained with reference to some
15 examples, to which, however, the invention is not limited at all.

[SYNTHESIS EXAMPLE 1]

In 300 ml acetone, 120.2 g of
20 1,1,1-tris(hydroxymethyl)ethane and 75.0 g of 2-methoxypropene were suspended. After the addition of one drop of concentrated sulfuric acid at 0°C, the suspension was stirred for one hour. Then, the temperature of the suspension was set back to room temperature, and the suspension was further stirred for 2 hours.
25 After the elimination of acetone by distillation, the distillate

obtained under a reduced pressure of 1.7 mmHg at 70°C was collected to yield 155.2 g of (1,4,4-trimethyl-3,5-dioxanylmethane-1-ol.

5 [SYNTHESIS EXAMPLE 2]

In 90 ml tetrahydrofuran, 48.1 g of cis-1,2-cyclohexanedicarboxylic anhydride, 46.3 g of the (1,4,4-trimethyl-3,5-dioxanylmethane-1-ol prepared in Synthesis Example 1 and 1.8 g of 4-(dimethylamino)pyridine were
10 dissolved, and the resulting mixture was refluxed for 6 hours under heating. After the elimination of the tetrahydrofuran by distillation, the mixture was subjected to silica gel column chromatography to yield 54.7 g of
2-((1,4,4-trimethyl-3,5-dioxanylmethyl)oxycarbonyl)cyclohexanecarboxylic acid.
15

[SYNTHESIS EXAMPLE 3]

In 100 ml of tetrahydrofuran, the 2-((1,4,4-trimethyl-3,5-dioxanylmethyl)oxycarbonyl)cyclohexanecarboxylic acid prepared in Synthesis Example 2 was
20 dissolved. To the solution was added 40 ml of 1N hydrochloric acid, and the resulting solution was stirred for 2 hours at room temperature. After condensation, the solution was added with 100 ml tetrahydrofuran and 100 g anhydrous magnesium sulfate.
25 Thereafter, the mixture was left to stand still for one hour.

Then the filtrate obtained by filtration was condensed followed by silica gel column chromatography treatment to yield 25.3 g of

2-((3-hydroxy-2-hydroxymethyl)-2-methylpropylmethyl)oxycarbonyl)cyclohexanecarboxylic acid.

[SYNTHESIS EXAMPLE 4]

In a 500 ml three-neck round bottle flask equipped with a stirrer, 24.7 g of the
10 2-((3-hydroxy-2-hydroxymethyl)-2-methylpropylmethyl)oxycarbonyl)cyclohexanecarboxylic acid prepared in Synthesis Example 3, and 10.0 g of a polypropylene glycol having a molecular weight of 1,000 were dissolved in 100 ml N,N-dimethylacetamide. To the resulting solution were added 3.4 g of
15 hexamethylenediisocyanate and 20.0 g of 4,4'-diphenylmethanediisocyanate and five drops of di-n-butyl tin dilaurate, and the mixture was stirred at 100°C for 5 hours. Thereafter, the mixture was diluted with 200 ml N,N-dimethylacetamide and 400 ml methanol. This reaction
20 mixture was thrown into 4 liters of water under stirring whereby a white polymer deposited. After filtration, the polymer was washed with water, and dried in vacuum to yield 50.5 g of urethane polymer P-1 listed in Table 1. The weight-averaged molecular weight of this polymer measured by gel permeation chromatography
25 was 42,000 in terms of polystyrene equivalent value, and the

acid value was 1.52 meq/g.

[SYNTHESIS EXAMPLE 5]

By repeating the processes of Synthesis Example 4 except
5 that methanol was changed to 2-hydroxyethyl methacrylate, 51.1
g of urethane polymer P-2 was prepared.

[SYNTHESIS EXAMPLE 6]

Similarly, binder polymers P-3 to P-30 and comparative
10 samples PR-1 to PR-3 shown in Tables 1 and 2 were prepared.

Table 1

Binder polymer	Component 1	Component 2	Component 3	Component 4	Polymerization molar ratio (charged monomer ratio)	Polymer chain end capping	Mol. W. (10000)	Acid value (meq/g)
P-1	PO-1	PD-13	PI-1	PI-7	45/5/10/40	MeOH	4.2	1.52
P-2	PO-1	PD-13	PI-1	PI-7	45/5/10/40	HENA	4.2	1.51
P-3	PO-1	PD-1	PI-2	PI-8	40/10/20/30	EtOH	1.9	1.69
P-4	PO-1	PD-4	PI-3	PI-5	20/30/15/35	GDMA	0.9	0.81
P-5	PO-1	PD-5	PI-5	PI-6	40/10/25/25	CHOH	8.7	1.72
P-6	PO-1	PD-8	PD-12	PI-1	5/30/15/50	MeOH	6.3	1.87
P-7	PO-1	PD-9	PD-11	PI-7	10/25/15/50	MeOH	1.5	1.61
P-8	PO-1	PD-12	PD-13	PI-4	40/5/5/50	MPOH	10.5	2.26
P-9	PO-1	PO-7	PI-3	PI-4	35/15/45/5	MPOH	6.1	2.02
P-10	PO-1	PO-9	PO-16	PI-3	15/30/5/50	HEA	4.8	2.02
P-11	PO-1	PI-1	PI-3	PI-8	50/5/15/30	HEMA	6.2	1.92
P-12	PO-2	PD-2	PI-2	PI-5	30/20/10/40	GAMA	8.1	1.44
P-13	PO-2	PO-4	PO-6	PI-7	10/20/20/50	CHOH	12.9	1.79
P-14	PO-3	PD-6	PD-10	PI-2	30/15/5/50	MeOH	7.3	1.50
P-15	PO-4	PD-10	PI-3	PI-5	45/5/35/15	MPOH	2.3	1.72
P-17	PO-4	PO-10	PO-11	PI-6	10/30/10/50	HEA	5.1	1.80
P-18	PO-5	PD-3	PD-6	PI-1	25/5/20/50	MeOH	0.6	1.29
P-19	PO-6	PO-12	PD-13	PI-1	15/15/20/50	MPOH	3.6	0.74
P-20	PO-6	PD-14	PI-1	PI-4	45/5/35/15	MeOH	5.0	1.01

Table 2

Binder Polymer	Component 1	Component 2	Component 3	Component 4	Polymerization molar ratio (charged monomer ratio)	Polymer chain end capping	Mol. W. (10000)	Acid value (meq/g)
P-21	PO-7	PD-4	PD-5	PI-3	25/15/10/50	HEA	3.9	1.05
P-22	PO-8	PD-2	PD-12	PI-4	40/5/5/50	MPOH	4.1	1.69
P-23	PO-9	PO-15	PI-3	PI-8	5/45/5/45	MeOH	11.2	1.74
P-24	PO-11	PD-1	PD-12	PI-1	30/10/10/50	CHOH	3.7	1.43
P-25	PO-11	PI-1	PI-5	PI-8	50/10/5/35	MPOH	6.4	2.02
P-26	PO-13	PD-5	PI-3	PI-4	15/35/5/45	MPOH	4.2	0.91
P-27	PO-14	PD-6	PD-14	PI-7	35/10/5/50	MeOH	5.1	0.74
P-28	PO-15	PD-11	PD-13	PI-7	5/25/20/50	GAMA	8.1	1.26
P-29	PO-15	PD-13	PI-3	PI-5	45/5/20/30	MPOH	5.5	1.49
P-30	PO-16	PD-4	PD-9	PI-7	35/5/10/50	HEMA	1.3	1.50
PR-1	PD-8	PD-13	PI-1	PI-7	35/15/10/40	MPOH	4.5	1.05
PR-2	PD-1	PD-5	PD-8	PI-3	5/10/35/50	HEMA	8.6	1.97
PR-3	PD-4	PD-11	PI-6	PI-8	35/15/25/25	MeOH	2.1	0.97

The abbreviations shown in Tables 1 and 2 mean the following compounds.

MeOH: methanol

5 EtOH: ethanol

MPOH: 1-methoxy-2-propanol


CHOH: cyclohexyl alcohol

HEA: 2-hydroxyethyl acrylate


HEMA: 2-hydroxyethyl methacrylate

10 GAMA: glycerol acrylate methacrylate


GDMA: glycerol dimethacrylate




PO-1




PO-5




PO-2




PO-6




PO-3



PO-7




PO-4




PO-8


CONFIDENTIAL




PO-9




PO-13




PO-10




PO-14




PO-11




PO-15




PO-12




PO-16




P D - 1




P D - 2




P D - 3




P D - 4




P D - 5




P D - 6




P D - 7




PD-8




PD-9




PD-10

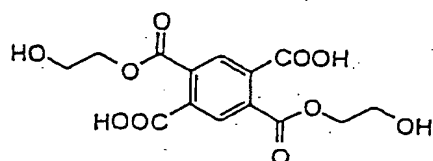

PD-11




Average molecular weight: 300, $n \approx 7$ PD-12



PD-13

Average molecular weight: 1,000, $n \approx 17$




PD-14


Hydroxyl value: 56.3 mg KOH/g



PI-1




PI-2




PI-3




PI-4




PI-5



PI-6



PI-7



PI-8

(Examples 1 to 20 and Comparative Examples 1 to 3)

By following the procedures to be described below, a series of negative type photosensitive lithographic printing plates were prepared, and the printing characteristics thereof were evaluated. The results are summarized in Table 3.

[Preparation of Support]

A JIS A 1050 aluminum web of 0.24 mm thickness and 1030 mm width was continuously subjected to the following treatments.

(a) The surface of the sheet was mechanically grained with rotating nylon brush rollers along with feeding, on the surface of the aluminum web, a graining slurry comprising an aqueous suspension of pumice as the abrasant with a specific gravity of 1.12. The average particle diameter of the abrasant was 40 to 45 μm with the maximum diameter of 200 μm . The nylon brushes were made of 6-10 nylon, the hair length was 50 mm, and the diameter of the hair was 0.3 mm. The nylon brush was fabricated by transplanting the hairs into holes closely made at the surface of a stainless steel pipe of 300 mm ϕ . Three rotating brushes were used. Two supporting rollers of 200 mm ϕ arranged beneath the brush rollers were separated from each other by 300 mm. The brush rollers were pushed to the aluminum web by such a force that the load to the driving motor which rotated the brush increased by 7 kW compared to the load before

the rollers were brought into contact with the sheet. The rotating direction of the brushes was the same as the moving direction of the aluminum web, and the rate of rotation was 200 rpm.

5 (b) The grained aluminum web was subjected to an etching treatment by spraying a solution containing 26% by weight of caustic soda and 6.5% by weight of aluminum ion at 70°C to dissolve 0.3 g/m² aluminum. Thereafter, the sheet was rinsed by spraying water.

10 (c) Desmutting was conducted on the sheet by spraying an aqueous 1% by weight nitric acid (containing 0.5% by weight of aluminum ion) at 30°C, and then the sheet was rinsed by spraying water. The aqueous nitric acid used for the above desmutting is the waste solution resulting from the electrochemical
15 graining conducted in an aqueous nitric acid with use of ac.

(d) Electrochemical graining was conducted using a 60 Hz ac in a continuous mode. The electrolytic solution was an aqueous 1% by weight nitric acid (containing 0.5% by weight of aluminum ion and 0.007% by weight of ammonium ion) kept at
20 40°C. The waveform of the ac was trapezoidal having TP, a time required for the current reaching the peak from zero, of 2 msec, and a duty ratio of 1:1. A carbon electrode was used as the counter electrode for the electrochemical graining. A ferrite auxiliary anode was used. The peak current density was 30 A/dm²,
25 and the electric quantity was 255 C/cm² in total when the aluminum

web acted as anode. To the auxiliary electrode, 5% of the current from the power source was divided. After the graining, the sheet was rinsed by spraying water.

(e) The grained aluminum web was etched by spraying a solution containing 26% by weight of caustic soda and 6.5% by weight of aluminum ion at 32°C to dissolve 0.2 g/m² of the aluminum web whereby the smut component mainly comprising aluminum hydroxide formed during the preceding electrochemical graining using ac was eliminated and the edge portion of the pits formed was dissolved to smoothen the edge. Thereafter, the sheet was rinsed by spraying water.

(f) Desmutting was conducted on the sheet by spraying an aqueous 25% by weight sulfuric acid (containing 0.5% by weight of aluminum ion) at 60°C, and then the sheet was rinsed by spraying water.

(g) By using a conventional anodic oxidation apparatus for two-step electrolytic treatment (the lengths of the first and second electrolysis parts: 6 m, the length of the first electric feeding part: 3 m, the length of the second electric feeding part: 3 m, and the length of the first and second feeding electrodes: 2.4 m), an anodic oxidation treatment was conducted with the sulfuric acid concentration at the electrolysis part of 170 g/liter (containing 0.5% by weight of aluminum ion) at 38°C. Thereafter, the sheet was rinsed by spraying water. In this treatment, the current from the power source flows into

099587e-110601

the first feeding electrode provided in the first electric feeding part, then to the aluminum web via the electrolytic solution to form an oxide film on the surface of the aluminum web at the first electrolysis part, further passes through the electrolysis electrode provided in the first electric feeding part, and returns to the power source. On the other hand, the current from the power source flows into the second feeding electrode provided in the second electric feeding part, and then similarly to the aluminum web via the electrolytic solution to form an oxide film on the surface of the aluminum web at the second electrolysis part. The electric quantity fed to the first feeding part from the power source is the same as that fed to the second feeding part, and the feeding current density at the oxide film-bearing surface at the second feeding part was about 25 A/dm². In the second feeding part, feeding was done from the surface having an oxide film of 1.35 g/m². The amount of the oxide film finally obtained was 2.7 g/m². The aluminum support at this stage is designated [AS-1].

20 [Hydrophilicity-enhancing treatment]

A silicate treatment was conducted on aluminum support [AS-1] to enhance the hydrophilic nature as the non-image area of the printing plate by conveying the aluminum web in such a manner that the web was in contact with a 1.5% aqueous solution of No. 3 sodium silicate kept at 70°C for 15 seconds. Then,

the web was rinsed with water. The deposited amount of Si was 10 mg/m². The support thus finished is designated [AS-2].

[Coating of Interlayer]

5 Via the following procedure, a fluidized composition (a sol) for use in SG process was prepared. The following ingredients were charged and weighed in a beaker, and stirred for 20 min at 25°C.

	Tetraethoxysilane	38 g
10	3-Methacryloxypropyltrimethoxysilane	13 g
	85% aqueous phosphoric acid	12 g
	Ion-exchanged water	15 g
	Methanol	100 g

15 The solution was poured into a three-neck flask, which was equipped with a reflux cooler and put in an oil bath of room temperature. With stirring by means of a magnetic stirrer, the content of the three-neck flask was heated to 50°C over the period of 30 min. Then, the content was allowed to react for 1 hour at 50°C to give a sol. This sol fluid was diluted
20 with a mixture of methanol and ethylene glycol (20:1 in weight ratio) so as to give a concentration of 0.5% by weight. The diluted product was coated on aluminum support [AS-1] prepared above with a whirler, and dried at 100°C for one min. The coated weight was 3.5 mg/m² which was derived from the amount of Si
25 element determined by X-ray fluorescent analysis. The support

thus finished is designated [AS-3].

As a next treatment, a coating mixture of the following composition was coated on aluminum support [AS-2] with a wire bar, and dried at 90°C for 30 sec with a hot air stream-type drying apparatus. The coated amount after drying was 10 mg/m².

	Copolymer of ethyl methacrylate and Na	
	2-acrylamide-2-methyl-1-propanesulfonate with a	
	copolymerization molar ratio of 75:25	0.1 g
10	2-Aminoethylphosphonic acid	0.1 g
	Methanol	50 g
	Ion-exchanged water	50 g

The thus coated support is designated [AS-4].

15

[Coating of Photosensitive Layer]

On the aluminum support prepared in this manner, a negative type photosensitive composition consisting of the following ingredients was coated so as to give the coated amount on dry base shown in Table 3, and dried at 100°C for 1 min to provide a photosensitive layer.

	(Negative type photosensitive composition)	
	Addition-polymerizable compound (shown in Table 3)	1.5 g
25	Binder polymer (shown in Table 3)	2.0 g

	Spectral sensitizer (shown in Table 3)	0.2 g
	Photo-polymerization initiator (shown in Table 3)	0.4 g
	Co-spectral sensitizer (shown in Table 3)	0.4 g
	Fluorine-containing nonionic surfactant (Megafac F-177, a	
5	product of Dai-nippon Ink and Chemicals, Inc.)	0.03 g
	Heat-polymerization inhibitor (aluminum salt of	
	N-nitrosophenylhydroxylamine)	0.01 g
	Pigment dispersion for coloration described below	2.0 g
	Methyl ethyl ketone	20.0 g
10	Propylene glycol monomethyl ether	20.0 g
	(Pigment dispersion for coloration)	
	Pigment Blue 15:6	15 parts by weight
	Allyl methacrylate/methacrylic acid copolymer	
15	(copolymerization molar ratio: 80:20, weight-averaged	
	molecular weight: 40,000)	10 parts by weight
	Cyclohexanone	15 parts by weight
	Methoxypropyl acetate	20 parts by weight
	Propylene glycol monomethyl ether	40 parts by weight

20

[Coating of Protective Layer]

On this photosensitive layer, a 3% by weight aqueous solution of poly(vinyl alcohol) (degree of saponification: 98 mol%, degree of polymerization: 550) was coated so as to give

25 a coated amount on dry base of 2 g/m², and dried at 100°C for

2 min.

[Exposure to Negative Type Photosensitive Lithographic
Printing Plate]

5 On the negative type photosensitive lithographic printing
plate thus prepared, a solid image exposure and a 2540 dpi,
175 lines/inch halftone tint image exposure ranging from 1%
to 99% with 1% increment was given with use of an FD-YAG (532
nm) laser exposure device installed in Gutenberg, a plate-setter
10 made by Heiderberg Press-machine, Inc. At these exposures,
the laser power was adjusted so that the exposure energy density
at the plate surface was 200 $\mu\text{J}/\text{cm}^2$.

[Development/Plate-making]

15 Each of the developers shown in Table 3 and finisher FP-2W
(a product of Fuji Photo Film Co., Ltd.) were charged in automatic
processor FLP-813, a product of Fuji Photo Film Co., Ltd. The
exposed plate was developed and processed to produce a printing
plate with the processor under the condition of development
20 temperature of 30°C and development time of 18 sec.

[Test of Solid Area Printing Durability]

An R201 of Roland Co., Ltd. was used as the press machine,
and Graph G (N) of Dainippon Ink and Chemicals, Inc. was used
25 as the ink. The solid area obtained by uniform exposure was

visually inspected. The printing durability of the plate was expressed by the number of runs at which the solid area became non-uniform in density. Larger numbers indicate higher printing durabilities.

5

[Accelerated Test of Tint Area Printing Durability]

The same press machine, R201 of Roland Co., Ltd. was used as the press machine, and Graph G (N) of Dainippon Ink and Chemicals, Inc. was used as the ink. At the 5,000th print from the start, the tint area of the plate was wiped with a sponge impregnated with PS Plate Cleaner CL-2 made by Fuji Photo Film Co., Ltd. to remove the ink on the plate. Thereafter, 10,000 prints were produced, and the prints were visually inspected as to halftone dot deficiency.

15

(Examples 21 to 30 and Comparative Examples 4 to 6)

As in Examples 1 to 20, negative type photosensitive lithographic printing plates shown in Table 4 were prepared and evaluated on the characteristics thereof.

20

Each compound listed in Tables 3 and 4 will be shown below.

[Addition-polymerizable compound]

M-1: pentaerythritol tetraacrylate (NK Ester A-TMMT, a product of Shin Nakamura Chemical Industries, Ltd.)

25


M-2: glycerin dimethacrylate hexamethylenediisocyanate

urethane pre-polymer (UA 101H, a product of Kyoeisha Chemical Co., Ltd.)


M-3: dipentaerythritol acrylate (NK Ester A-9530, a product of Shin Nakamura Chemical Industries, Ltd.)

5


[Materials for photo-polymerization initiating system]




I-1




I-2

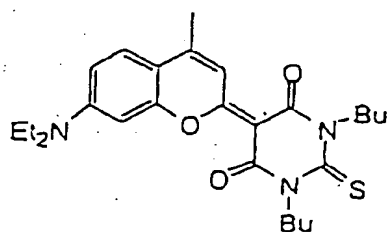


S-1

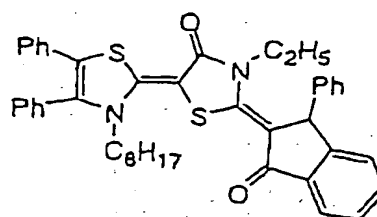


S-2

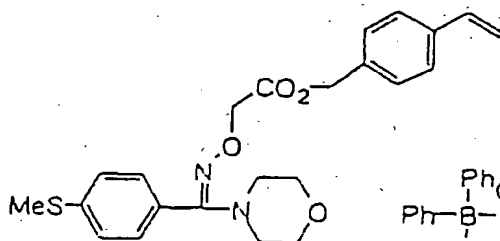

C-1



C-2



C-3

[Binder polymer]

PA-1

Allyl methacrylate (POC-1)/methacrylic acid copolymer

(copolymerization molar ratio: 80:20)

5 Acid value measured by NaOH titration: 1.70 meq/g

Weight-averaged molecular weight measured by GPC: 48,000

PA-2

Methyl methacrylate/ acrylonitrile/

N-[(4-sulfamoyl)phenyl]methacryamide copolymer

10 (copolymerization molar ratio: 37:30:33)

Weight-averaged molecular weight measured by GPC: 49,000

[Developer]

D-1

15 An aqueous solution of the following composition with
a pH of 10.

Monoethanolamine	0.1 parts by weight
------------------	---------------------


Triethanolamine	1.5 parts by weight
-----------------	---------------------

Compound of the following formula (1)	4 parts by weight
---------------------------------------	-------------------


20 Compound of the following formula (2)	2.5 parts by weight
--	---------------------

Compound of the following formula (2)	0.2 parts by weight
---------------------------------------	---------------------


Water	91.7 parts by weight
-------	----------------------



Formula (1)



Formula (2)



Formula (3)

In formula (1), R^{14} represents a hydrogen atom or butyl group.

D-2

An aqueous solution of the following composition.

1K potassium silicate	3.0 parts by weight
15 Potassium hydroxide	1.5 parts by weight
Compound of formula (3)	0.2 parts by weight
Water	95.3 parts by weight

Table 3

No.	Support	Photosensitive Layer						Develo per	Printing Durability	
		Add- pol. Comp.	Binder Polymer	Photo- pol. Initiator	Spectr Sensit izer	Co-sen sitize r	Coated Amount on Dry Base (g/m ²)		Solid Area (10000)	Half-tone Tint Area
Example 1	AS-3	M-1	P-1	I-1	S-1	C-1	1.2	D-2	25	Excellent
Example 2	AS-1	M-1	P-2	I-1	S-2	C-1	1.3	D-2	22	Good
Example 3	AS-3	M-2	P-4	I-2	S-1	C-3	1.4	D-2	33	Excellent
Example 4	AS-1	M-3	P-5	I-1	S-2	C-1	1.4	D-1	39	Good
Example 5	AS-3	M-2	P-7	I-1	S-2	C-2	1.3	D-2	33	Good
Example 6	AS-3	M-3	P-9	I-2	S-1	C-3	1.6	D-2	27	Excellent
Example 7	AS-3	M-1	P-11	I-1	S-1	C-2	1.2	D-2	28	Good
Example 8	AS-3	M-1	P-13	I-2	S-2	C-1	1.4	D-2	45	Excellent
Example 9	AS-1	M-2	P-16	I-2	S-1	C-1	1.5	D-2	37	Excellent
Example 10	AS-1	M-1	P-17	I-2	S-2	C-2	1.5	D-1	34	Excellent
Example 11	AS-3	M-2	P-18	I-1	S-2	C-1	1.4	D-2	21	Good
Example 12	AS-3	M-2	P-20	I-1	S-2	C-1	1.3	D-1	27	Excellent
Example 13	AS-1	M-3	P-22	I-2	S-1	C-1	1.4	D-2	30	Excellent
Example 14	AS-3	M-3	P-23	I-1	S-2	C-3	1.7	D-1	23	Excellent
Example 15	AS-3	M-1	P-24	I-2	S-1	C-1	1.4	D-2	27	Good
Example 16	AS-3	M-2	P-25	I-1	S-2	C-1	1.3	D-2	27	Excellent
Example 17	AS-1	M-3	P-26	I-2	S-1	C-1	1.5	D-2	25	Good
Example 18	AS-3	M-3	P-27	I-1	S-2	C-3	1.7	D-1	35	Excellent
Example 19	AS-1	M-3	P-28	I-1	S-2	C-3	1.5	D-1	30	Good
Example 20	AS-3	M-1	P-29	I-2	S-1	C-1	1.4	D-2	27	Good

Compar. Example 1	AS-3	M-1	PR-1	I-1	S-1	C-1	1.4	D-2	5	Excellent
Compar. Example 2	AS-3	M-3	PR-2	I-2	S-2	C-1	1.4	D-2	14	Dot deficiency
Compar. Example 3	AS-3	M-2	PR-3	I-1	S-1	C-2	1.4	D-2	4	Dot deficiency

Table 4

No.	Support	Photosensitive Layer					Spectr. Sens.	Co-sens.	Coated Amount on Dry Base (g/m ²)	Developer	Printing Durability	
		Add. Pol. Compound	Binder Polymer		Weight Ratio of 1:2	Phot-pol Initiator					Solid Area (10000)	Half-tone Tint Area
Example 21	AS-1	M-1	P-3	P-6	5/5	I-1	S-2	C-1	1.4	D-2	30	Good
Example 22	AS-3	M-3	P-8	P-21	6/4	I-1	S-1	C-1	1.2	D-2	28	Good
Example 23	AS-3	M-2	P-8	P-30	7/3	I-2	S-1	C-2	1.2	D-2	34	Good
Example 24	AS-1	M-2	P-10	P-21	8/2	I-1	S-2	C-1	1.4	D-1	33	Good
Example 25	AS-3	M-1	P-12	P-28	9/1	I-2	S-2	C-3	1.4	D-1	21	Excellent
Example 26	AS-3	M-1	P-14	P-15	3/7	I-2	S-1	C-1	1.6	D-2	24	Excellent
Example 27	AS-1	M-2	P-1	PA-1	8/2	I-1	S-1	C-1	1.4	D-2	21	Excellent
Example 28	AS-3	M-3	P-10	PA-2	5/5	I-1	S-1	C-1	1.4	D-1	23	Excellent
Example 29	AS-3	M-2	P-10	PA-2	7/3	I-2	S-2	C-3	1.7	D-1	22	Excellent
Example 30	AS-3	M-1	P-26	PR-3	7/3	I-2	S-2	C-1	1.2	D-1	27	Good
Compar. Example 4	AS-3	M-2	PR-1	PA-1	5/5	I-2	S-2	C-1	1.3	D-2	9	Dot deficiency
Compar. Example 5	AS-1	M-2	PR-1	PA-2	8/2	I-1	S-1	C-1	1.5	D-2	7	Good
Compar. Example 6	AS-3	M-3	PR-3	PA-1	9/1	I-1	S-1	C-3	1.5	D-1	10	Dot deficiency

[Examples 31 to 50 and Comparative Examples 7 to 9]

[Coating of photosensitive layer]

A coating mixture of the following composition was prepared and coated on aluminum support [AS-4] with a wire bar so as to give the coated amount after drying shown in Table 5. The coated support was dried at 115°C for 45 sec with use of a hot air stream-type drying apparatus to complete a photosensitive layer.

Coating mixture for the photosensitive layer.

Addition-polymerizable compound (shown in Table 5)	1.0 g
Binder polymer (shown in Table 5)	1.0 g
IR absorber (IR-1)	0.08 g
Heat-polymerization initiator (shown in Table 5)	0.3 g
Fluorine-containing nonionic surfactant (Megafac F-177, a product of Dai-nippon Ink and Chemicals, Inc.)	0.01 g
Naphthalenesulfonic acid salt of Victoria Pure Blue	0.04 g
Methyl ethyl ketone	9.0 g
Propylene glycol monomethyl ether	8.0 g
Methanol	10.0 g

[Coating of protective layer]

On the above photosensitive layer, an aqueous 3% by weight solution of poly(vinyl alcohol) (degree of saponification: 98 mol%, degree of polymerization: 550) was coated so as to give

was visually inspected. The printing durability of the plate was expressed by the number of runs at which the solid area becomes non-uniform in density. The larger the number is, the higher printing durability is indicated.

[Accelerated Printing Durability Test for Halftone Tint Area]


The same press machine, Lithron of Komori Corp. was used as the press machine, and Graph G (N) of Dainippon Ink and Chemicals, Inc. was used as the ink. At the 5,000th print from the start, the tint area of the plate was wiped with a sponge impregnated with PS Plate Cleaner CL-2 made by Fuji Photo Film Co., Ltd. to clean the ink on the plate. Thereafter, 10,000 prints were produced, and the prints were visually inspected as to halftone dot deficiency.

Table 5


No.	Support	Photosensitive Layer				Protect. Layer	Developer	Printing Durability	
		Add-polym. Compound	Binder Polymer		Weight Ratio of 1 to 2	Heat-pol. Init.	Coated Amount on Dry Base (g/m ²)	Solid Area (10,000)	Halftone Tint Area
			1	2					
Example 31	AS-4	M-3	P-2	None	-	OI-1	1.4	38	Excellent
Example 32	AS-4	M-3	P-3	None	-	OI-1	1.2	40	Good
Example 33	AS-1	M-2	P-5	None	-	OI-2	1.2	25	Good
Example 34	AS-4	M-1	P-7	None	-	OI-1	1.2	33	Excellent
Example 35	AS-2	M-3	P-11	None	-	OI-2	1.3	21	Excellent
Example 36	AS-4	M-3	P-14	None	-	OI-3	1.1	28	Excellent
Example 37	AS-3	M-2	P-16	None	-	OI-1	1.3	32	Excellent
Example 38	AS-3	M-2	P-19	None	-	OI-1	1.3	23	Excellent
Example 39	AS-4	M-1	P-21	None	-	OI-2	1.3	36	Excellent
Example 40	AS-4	M-1	P-23	None	-	OI-2	1.5	27	Good
Example 41	AS-3	M-3	P-25	None	-	OI-3	1.2	30	Good
Example 42	AS-3	M-3	P-27	None	-	OI-1	1.3	24	Good
Example 43	AS-4	M-3	P-29	None	-	OI-2	1.4	34	Good
Example 44	AS-4	M-2	P-10	P-6	8/2	OI-1	1.2	33	Good
Example 45	AS-2	M-1	P-12	P-24	9/1	OI-3	1.2	21	Excellent
Example 46	AS-4	M-3	P-14	PR-1	8/2	OI-2	1.3	24	Excellent
Example 47	AS-4	M-2	P-1	PA-1	8/2	OI-2	1.3	36	Excellent
Example 48	AS-3	M-3	P-10	PA-2	5/5	OI-1	1.4	23	Excellent
Example 49	AS-3	M-2	P-10	PA-2	7/3	OI-1	1.1	22	Excellent
Example 50	AS-1	M-3	P-26	PR-3	7/3	OI-2	1.3	27	Good
Compar. Example 7	AS-4	M-3	PR-1	None	-	OI-1	1.3	3	Dot deficiency
Compar. Example 8	AS-4	M-2	PR-2	None	-	OI-1	1.2	5	Good
Compar. Example 9	AS-4	M-3	PR-3	PA-1	9/1	OI-3	1.2	10	Dot deficiency

[Heat-polymerization initiators shown in Table 5]


IR-1

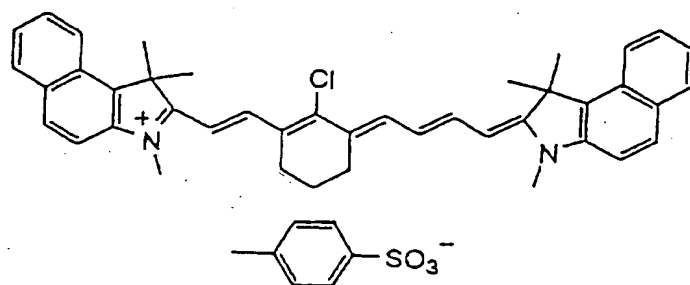


Ol-1

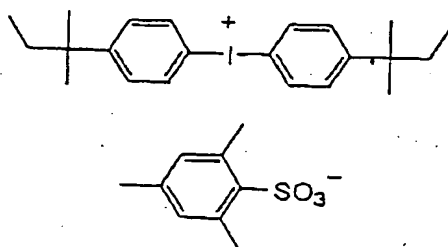

Ol-2

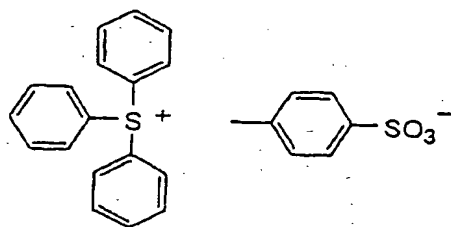

Ol-3

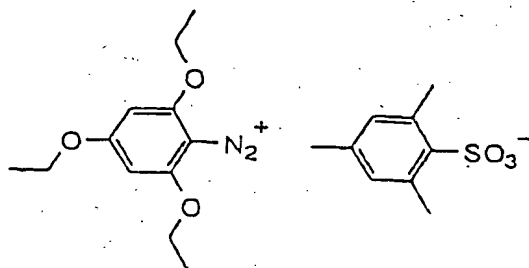

[Developer in Table 5]

D-3

Sodium carbonate monohydrate	10 g
Potassium bicarbonate	10 g
Sodium isopropylnaphthalenesulfonate	15 g
Sodium dibutylnaphthalenesulfonate	15 g
Sodium ethylene glycol mononaphthyl ether monosulfonate	10 g
Sodium sulfite	1 g
Tetra sodium salt of ethylenediaminetetraacetic acid	0.1 g
Ion-exchanged water	938.9 g

As is evident from Tables 3 to 5, the photosensitive lithographic printing plate associated with the invention having a photosensitive layer containing a polyurethane resin binder which has a aliphatic cyclic structure which has a carboxylic group as a substituent directly or indirectly attached to said structure can provide a printing plate having an extremely high printing durability.

The photosensitive lithographic printing plate of the invention can provide a printing plate having an extremely high printing durability owing to the use of a photosensitive layer containing a polyurethane resin binder which has a aliphatic

cyclic structure which has a carboxylic group as a substituent directly or indirectly attached to said structure. Further, the photosensitive lithographic printing plate of the invention is suited for scanning exposure with a laser light, enabling a high-speed writing and simultaneously achieving a high productivity.

(SYNTHESIS EXAMPLE 7)

44.7 g of a polyvinyl alcohol having a saponification degree of 99% and a weight-average polymerization degree of 500 was dissolved in 775.0 g of purified water. The aqueous solution thus prepared was then cooled to a temperature of 5°C. To the aqueous solution was then added 1.6 g of concentrated hydrochloric acid (35% by weight) with stirring. To the mixture was then added dropwise 30.9 g of cyclohexanecarboxy aldehyde in 10 minutes. When 45 minutes passed from the beginning of dropwise addition, precipitation occurred. When 10 minutes passed from precipitation, 110.0 g of concentrated hydrochloric acid (35% by weight) was then added to the mixture. The mixture was allowed to stand for 4 hours, and then heated to a temperature of 60°C where it was then kept for 4 hours to obtain a polyvinyl acetal. The polyvinyl acetal thus obtained was washed twice with purified water, dispersed in 800 g of purified water so that it was neutralized, and then stirred with its pH value kept to 9.5 for 4 hours. The polyvinyl acetal thus obtained

was dehydrated, and then extracted with n-hexane as a solvent in a Soxhlet extractor overnight so that the residual aldehyde was removed to obtain 68.0 g of a polyvinyl acetal. The polyvinyl acetal thus obtained had a polymerization degree of 550, a residual hydroxyl group content of 43.5 and a residual acetyl group content of 1.5.

(SYNTHESIS EXAMPLE 8)

16.9 g of the polyvinyl acetal obtained in Synthesis Example 7 was added to 170 g of N,N-dimethylformamide. The mixture was then stirred at a temperature of 90°C for 3 hours to make a solution. To the solution thus obtained was then added dropwise a solution of 6.1 g of 1,2-cyclohexanedicarboxylic anhydride in 30 g of N,N-dimethylformamide at a temperature of 90°C in 15 minutes. Thereafter, to the solution was added 0.6 g of 4-(dimethylamino)pyridine. The mixture was then stirred at a temperature of 90°C for 4 hours. The mixture was then allowed to cool to a temperature of 60°C. To the mixture was then added 7.3 g of acetic acid. The mixture was then allowed to cool to room temperature. The solution was added to a mixture of 1,400 g of water and 40 g of methanol, and then stirred for 2 hours. The resulting white solid was withdrawn by filtration, and then dried to obtain 21.4 g of a binder polymer (P-31) according to the invention set forth in Table 6. The binder

polymer thus obtained exhibited a weight-average molecular weight of 61,000 in polystyrene equivalence as determined by gel permeation chromatography, a residual hydroxyl group content of 15.5, a residual acetyl group content of 1.5 and an acid value of 1.69 meq/g.

(SYNTHESIS EXAMPLE 9)

Binder polymers (P-32) to (P-50) according to the second preferred embodiment of the invention and comparative samples (PR-4) to (PR-6) set forth in Tables 6 and 7 were obtained in the same manner as mentioned above.


Table 6

Binder polymer	R ¹	R ²	R ³	Molar ratio (a/b/c/d/e)	molecular weight (unit: 10,000)	Acid value (meq/g)
P-31	P1-1	None	P3-5	55/0/28/15.5/1.5	6.1	1.69
P-32	P1-1	None	P3-1	55/0/35/8.5/1.5	5.9	2.20
P-33	P1-1	None	P3-2	55/0/32/8/5	8.3	2.04
P-34	P1-1	None	P3-3	60/0/38/0/2	12.3	2.01
P-35	P1-1	P2-1	P3-4	25/20/40/13/2	8.3	2.05
P-36	P1-1	None	P3-6	40/0/25/30/5	2.6	1.52
P-37	P1-1	None	P3-7	55/0/15/20/10	0.8	0.98
P-38	P1-1	P2-2	P3-8	35/25/10/25/5	6.5	1.29
P-39	P1-1	None	P3-9	60/0/30/9/1	4.5	1.66
P-40	P1-1	None	P3-10	40/0/40/10/10	10.3	2.30
P-41	P1-2	P2-4	P3-5	20/35/30/10/5	18.9	1.55
P-42	P1-3	None	P3-2	55/0/25/15/5	8.3	1.39
P-43	P1-4	P2-3	P3-3	40/10/30/6/14	5.5	1.66
P-44	P1-5	None	P3-6	55/0/40/0/5	8.3	1.72
P-45	P1-6	None	P3-10	30/0/60/5/5	21.2	2.78
PR-4	None	P2-1	P3-1	0/50/30/10/10	11.3	2.05
PR-5	None	P2-2	P3-3	0/70/25/0/5	6.6	1.30
PR-6	None	P2-4	P3-5	0/45/30/23/2	5.4	1.85


Table 7

Binder polymer	R ¹	R ²	R ³	Molar ratio (a/b/c/d/e)	molecular weight (unit: 10,000)	Acid value (meq/g)
P-46	P1-1/P1-2 (25/30)	None	P3-2	55/0/40/4/1	12.5	2.11
P-47	P1-5	None	P3-1/P3-10 (15/15)	65/0/30/0/5	7.6	1.47
P-48	P1-6	P2-1/P2-4 (5/25)	P3-5	20/30/35/10/5	5.5	1.80
P-49	P1-3/P1-4 (5/35)	None	P3-6/P3-7 (20/15)	40/0/35/14/11	6.1	1.88
P-50	P1-1/P1-5 (20/20)	P2-4	P3-4	40/5/40/10/5	3.2	2.00


In Tables 6 and 7, P1-1 to P1-6, P2-1 to P2-4 and P3-1 to P3-10 have the following structures, respectively.




P1 -1




P1 -4




P1 -2




P1 -5




P1 -3




P1 -6




P2 -1



P2 -3



P2 -2



P2 -4

(Examples 51 to 70, Comparative Examples 10 to 12)

A negative-working photosensitive lithographic printing plate was prepared according to the following procedure. The negative-working photosensitive lithographic printing plate thus prepared was then evaluated for printing properties. The results are set forth in Table 8.

[Preparation of support]

A JIS A 1050 aluminum plate having a thickness of 0.24 mm and a width of 1,030 mm was subjected to the following continuous processing.

(a) Using an existing mechanical roughening machine, the aluminum plate was subjected to mechanical roughening with a rotating roller nylon brush with an aqueous suspension of an abrasive (pumice) having a specific gravity of 1.12 supplied on the surface thereof as an abrasive slurry. The abrasive had an average particle diameter of from 40 to 45 μm and a maximum particle diameter of 200 μm . The nylon brush was made of 6.10 nylon and had a hair length of 50 mm and a hair diameter of 0.3 mm. The nylon brush was prepared by planting these nylon hairs in holes formed in a stainless steel cylinder having a diameter of 300 mm. Three such rotary brushes were used. The distance between two supporting rollers ($\phi 200$ mm) under these brushes was 300 mm. The brush rollers were pressed against

the aluminum plate in such a manner that the load of the driving motor for rotating the brush was 7 kw plus that developed before the pressing of the brush roller against the aluminum plate. The direction of rotation of the brush was the same as that of movement of the aluminum plate. The rotary speed was 200 rpm.

(b) The aluminum plate was spray-etched with a solution having a caustic soda concentration of 2.6% by weight and an aluminum ion concentration of 6.5% by weight at a temperature of 70°C so that it was dissolved at a rate of 0.3 g/m². The aluminum plate thus etched was then spray-washed with water.

(c) The aluminum plate was spray-desmuted with a 1 wt-% aqueous solution of nitric acid (aluminum ion content: 0.5% by weight) at a temperature of 30°C, and then spray-washed with water. As the aqueous solution of nitric acid for desmutting there was used a waste liquid from a step of electrochemical roughening in an aqueous solution of nitric acid with an alternating current.

(d) The aluminum plate was then subjected to continuous electrochemical roughening with an alternating voltage of 60 Hz. The electrolytic solution used herein was a 1 wt-% aqueous solution of nitric acid (aluminum ion content: 0.5% by weight; ammonium ion content: 0.007% by weight). The temperature of the electrolytic solution was 40°C. As the alternating power supply there was used a rectangular alternating current having

6998552110601

(g) Using an existing anodizing apparatus employing a two-stage power supply electrolysis process (length of the first and second electrolysis zones: 6 m; length of the first power supply zone: 3 m; length of the second power supply zone: 3 m; length of the first and second power supply electrodes: 2.4 m), the aluminum plate was subjected to anodic oxidation with the sulfuric acid concentration in the electrolysis zone predetermined to 170 g/l (aluminum ion content: 0.5% by weight) at a temperature of 38°C. The aluminum plate was then spray-washed with water. At this time, in the anodizing apparatus, the current from the power supply flew into the first power supply electrode provided in the first power supply zone, flow into the plate-like aluminum through the electrolytic solution to form an oxide film on the plate-like aluminum in the first electrolysis zone, and then flew back to the power supply through the electrolysis electrode provided in the first power supply zone. On the other hand, the current from the power supply flew into the second power supply electrode provided in the second power supply zone, and then flew into the plate-like aluminum through the electrolytic solution to form an oxide film on the surface of the plate-like aluminum in the second electrolysis zone. The quantity of electricity supplied from the power supply into the first power supply zone is equal to the quantity of electricity supplied from the power supply into the second power supply zone. The density of electric current

supplied into the oxide film in the second supply zone was about 25 A/dm². In the second power supply zone, electricity was supplied from the surface of oxide film of 1.35 g/m². The amount of final oxide film was 2.7 g/m². The aluminum support thus prepared is designated as [AS-5].

[Hydrophilic treatment]

The aluminum support [AS-5] was then treated with silicate to enhance the hydrophilicity of the non-image area on the printing plate. The silicate treatment was carried out by passing the aluminum web through a 1.5% aqueous solution of No. 3 sodium silicate which had been kept at a temperature of 70°C in such a manner that it was brought into contact with the aqueous solution for 15 seconds, and then washing the web with water. The attached amount of Si was 10 mg/m². The substrate thus processed is designated as [AS-6].

[Coating of interlayer]

An SG process liquid composition (sol) was prepared according to the following procedure. The following compositions were measured out in a beaker, and then stirred at a temperature of 25°C for 20 minutes.

Tetraethoxysilane	38 g
3-Methacryloxypropyl trimethoxysilane	13 g
85% Aqueous solution of phosphoric acid	12 g

Ion-exchanged water	15 g
Methanol	100 g

The solution thus prepared was transferred into a three-necked flask which was then equipped with a reflux condenser. The three-necked flask was then dipped in a room temperature oil bath. The content in the three-necked flask was then heated to a temperature of 50°C with stirring by a magnetic stirrer in 30 minutes. While the bath temperature was being kept at 50°C, the reaction mixture was then reacted for 1 hour to obtain a liquid composition (sol). This sol was diluted with a 20/1 (by weight) mixture of methanol and ethylene glycol to a concentration of 0.5% by weight, wheeler-coated onto the aluminum substrate [AS-5], and then dried at a temperature of 100°C for 1 minute. The coated amount of the sol was 3.5 mg/m². For the determination of the coated amount of the sol, the amount of Si element was determined by fluorescent X-ray analysis. The support thus prepared is designated as [AS-7].

Subsequently, a solution having the following formulation was applied to the aluminum support [AS-6] by means of a wire bar, and then dried at a temperature of 90°C for 30 seconds in a hot air drier. The dried amount of coat was 10 mg/m².

75 : 15 (molar ratio) copolymer of
ethyl methacrylate and sodium 2-
acrylamide-2-methyl-1-propanesulfonate 0.1 g

2-Aminoethylphosphonic acid 0.1 g

Methanol 50 g

Ion-exchanged water 50 g

The support thus prepared is designated as [AS-8].

Subsequently, a solution having the following formulation was applied to the aluminum support [AS-5] by means of a wire bar, and then dried at a temperature of 100°C for 30 seconds in a hot air drier. The dried amount of coat was 30 mg/m².


Crosslinkable quaternary ammonium salt

polymer represented by the following formula (AA)

general formula 0.75 g

Methanol 200 g

The support thus prepared is designated as [AS-9].

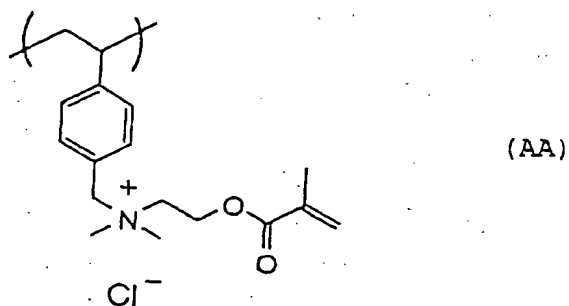

[Coating of photosensitive layer]

A negative-working photosensitive composition having the following formulation was applied to the aluminum plate thus processed in an amount set forth in Table 8, and then dried

at a temperature of 100°C for 1 minute to form a photosensitive layer.

(Negative-working photosensitive composition)

Addition-polymerizable compound (compound set forth in Table 8)	1.5 g
Binder polymer (compound set forth in Table 8)	2.0 g
Sensitized dye (compound set forth in Table 8)	0.2 g
Photopolymerization initiator (compound set forth in Table 8)	0.4 g
Co-sensitized dye (compound set forth in Table 8)	0.4 g
Fluorine-based nonionic surface active agent (Megafac F-177, produced by DAINIPPON INK & CHEMICALS, INC.)	0.03 g
Heat polymerization inhibitor (N- nitrosophenylhydroxylamine aluminum salt)	0.01 g
Colored pigment dispersion having the following formulation	2.0 g
Methyl ethyl ketone	20.0 g
Propylene glycol monomethyl ether	20.0 g

(Colored pigment dispersion)

Pigment blue 15 : 6	15 parts by weight
Acryl methacrylate/methacrylic acid copolymer (copolymerization molar ratio: 80/20; weight-average molecular weight: 40,000)	10 parts by weight
Cyclohexanone	15 parts by weight
Methoxypropyl acetate	20 parts by weight
Propylene glycol monomethyl ether	40 parts by weight

[Coating of protective layer]

A 3 wt-% aqueous solution of a polyvinyl alcohol (saponification degree: 98 mol-%; polymerization degree: 550) was applied to the photosensitive layer in a dry coated amount of 2 g/m², and then dried at a temperature of 100°C for 2 minutes.

[Exposure of negative-working photosensitive lithographic printing plate]

Using a Type FD-YAG (532 nm) laser exposing machine (plate setter produced by Heidelberg Inc.; Gutenberg), the negative-working

As a printing machine there was used a Type R201 printing machine produced by Roland Corporation. As an ink there was used Graph G(N) produced by DAINIPPON INK & CHEMICALS, INC. When 5,000 sheets were printed, the printing plate was then wiped off at the dot area with a printing sponge wet with a Type CL-2 plate cleaner produced by Fuji Photo Film Co., Ltd. to remove the ink from the surface of the plate. Thereafter, 10,000 sheets were printed. The printed matter was then visually observed to see if dots were lost on the plate.

(Examples 71 to 80; Comparative Examples 13 to 15)

Negative-working photosensitive lithographic printing plates set forth in Table 9 were prepared in the same manner as in Examples 51 to 70. These negative-working photosensitive lithographic printing plates were then evaluated for properties.

The various compounds set forth in Tables 8, 9 and 10 will be further described hereinafter.


[Addition-polymerizable compounds]

M-1: Pentaerythritol tetraacrylate (NK ester A-TMMT, produced by Shinnakamura Chemical Co., Ltd.)


M-2: Glycerin dimethacrylate hexamethylene diisocyanate urethane polymer (US101H, produced by Kyoeisha Chemical Co., Ltd.)

M-3: Dipentaerythritol acrylate (NK ester A-9530, produced by Shinnakamura Chemical Co., Ltd.)


[Photopolymerization initiator material]




I-1




I-2

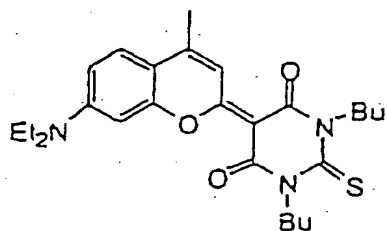


S-1

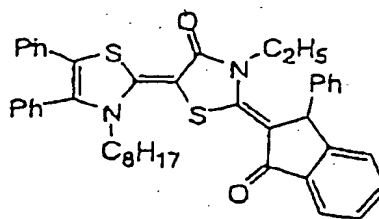


S-2

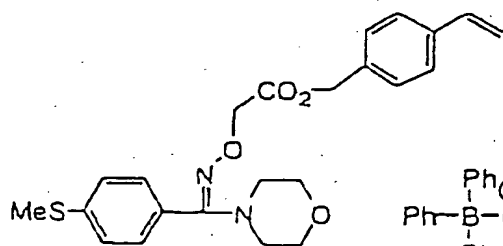

C-1



C-2



C-3

[Binder polymer]

PA-1

Methacrylic acid allyl/methacrylic acid copolymer
(copolymerization molar ratio: 80/20)

Acid value measured by titration with NaOH: 1.70 meq/g

Weight-average molecular weight determined by GPC
process: 48,000

PA-2

Methacrylic acid
methyl/acrylonitrile/N-[(4-sulfamoyl)phenyl]methacrylamide
copolymer (copolymerization molar ratio: 37/30/33)

Weight-average molecular weight determined by GPC
process: 49,000

PA-3

Polyurethane resin as a polycondensate of the following
diisocyanate with the following diol

4,4'-Diphenylmethane diisocyanate (MDI)

Hexamethylene diisocyanate (HMDI)

Polypropylene glycol (weight-average molecular weight:
1,000 (PPG10000))

2,2-Bis(hydroxymethyl)propionic acid (DMPA)

Copolymerization molar ratio (MDI/HMDI/PPG1000/DMPA):
40/10/15/35

Acid value measured by titration with NaOH: 1.05 meq/g


Weight-average molecular weight determined by GPC
process: 45,000

[Developer]


D-1

Aqueous solution with pH 10 having the following formulation


Monoethanolamine	0.1 parts by weight
Triethanolamine	1.5 parts by weight
Compound of the following general formula (1)	4.0 parts by weight
Compound of the following general formula (2)	2.5 parts by weight
Compound of the following general formula (3)	0.2 parts by weight
Water	91.7 parts by weight



(1)



(2)



(3)

wherein R¹⁴ represents a hydrogen atom or butyl group.

D-2.

Aqueous solution having the following formulation

1K potassium silicate	3.0 parts by weight
Potassium hydroxide	1.5 parts by weight
Compound of the general formula (3)	0.2 parts by weight
Water	95.3 parts by weight

Table 8

Example No.	Support	Photosensitive layer				Sensitized dye	Co-sensitizer	Dry coated amount (g/m ²)	Developer	Printing durability	
		Addition-polymerizable compound	Binder polymer	Heat polymerization initiator						Image area (unit: 10,000 sheets)	Dot area
Example 51	AS-7	M-1	P-31	I-1		S-1	C-1	1.2	D-2	27	Extremely good
Example 52	AS-5	M-1	P-32	I-1		S-2	C-1	1.3	D-2	24	Good
Example 53	AS-9	M-2	P-30	I-2		S-1	C-3	1.4	D-2	31	Extremely good
Example 54	AS-6	M-3	P-34	I-1		S-2	C-1	1.4	D-1	35	Good
Example 55	AS-7	M-2	P-35	I-1		S-2	C-2	1.3	D-2	35	Good
Example 56	AS-8	M-3	P-36	I-2		S-1	C-3	1.6	D-2	24	Extremely good
Example 57	AS-7	M-1	P-37	I-1		S-1	C-2	1.2	D-2	20	Good
Example 58	AS-7	M-1	P-38	I-2		S-2	C-1	1.4	D-2	42	Extremely good
Example 59	AS-5	M-2	P-39	I-2		S-1	C-1	1.5	D-2	31	Extremely good
Example 60	AS-9	M-1	P-40	I-2		S-2	C-2	1.5	D-1	39	Extremely good
Example 61	AS-7	M-2	P-41	I-1		S-2	C-1	1.4	D-2	25	Good
Example 62	AS-6	M-2	P-42	I-1		S-2	C-1	1.3	D-2	24	Extremely good
Example 63	AS-5	M-3	P-43	I-2		S-1	C-1	1.4	D-2	30	Extremely good
Example 64	AS-7	M-3	P-44	I-1		S-2	C-3	1.7	D-1	26	Extremely good
Example 65	AS-7	M-1	P-45	I-2		S-1	C-1	1.4	D-2	27	Good
Example 66	AS-8	M-2	P-46	I-1		S-2	C-1	1.3	D-1	24	Extremely good
Example 67	AS-5	M-3	P-47	I-2		S-1	C-1	1.5	D-2	25	Good
Example 68	AS-7	M-3	P-48	I-1		S-2	C-3	1.7	D-1	38	Extremely good
Example 69	AS-5	M-3	P-49	I-1		S-2	C-3	1.5	D-1	30	Good
Example 70	AS-9	M-1	P-50	I-2		S-1	C-1	1.4	D-2	27	Good
Comparative Example 10	AS-7	M-1	PR-4	I-1		S-1	C-1	1.4	D-2	5	Extremely good
Comparative Example 11	AS-7	M-3	PR-5	I-2		S-2	C-1	1.4	D-2	14	Dots lost

109011" 2/25/60

Comparative Example 12	AS-5	N-2	PR-6	I-1	S-1	C-2	1.4	D-2	4	Dots lost
---------------------------	------	-----	------	-----	-----	-----	-----	-----	---	-----------

Table 9

Example No.	Support	Photosensitive layer					Heat polymerization initiator	Sensitized dye	Co-sensitizer	Dry coated amount (g/m ²)	Developer	Printing durability	
		Addition-polymerizable compound	Binder polymer		Weight ratio (1 : 2)	Image area (unit: 10,000 sheets)						Dot area	
			1	2									
Example 71	AS-5	M-1	P-31	P-36	5/5	I-1	S-2	C-1	1.4	D-2	30	Good	
Example 72	AS-7	M-3	P-33	P-39	6/4	I-1	S-1	C-1	1.2	D-2	28	Good	
Example 73	AS-7	M-2	P-34	P-40	7/3	I-2	S-1	C-2	1.2	D-2	34	Good	
Example 74	AS-6	M-2	P-39	P-48	8/2	I-1	S-2	C-1	1.4	D-1	33	Good	
Example 75	AS-7	M-1	P-40	P-41	9/1	I-2	S-2	C-3	1.4	D-1	21	Extremely good	
Example 76	AS-7	M-1	P-47	P-50	3/7	I-2	S-1	C-1	1.6	D-2	24	Extremely good	
Example 77	AS-5	M-2	P-31	PA-1	8/2	I-1	S-1	C-1	1.4	D-2	21	Extremely good	
Example 78	AS-8	M-3	P-31	PA-2	5/5	I-1	S-1	C-1	1.4	D-1	23	Extremely good	
Example 79	AS-7	M-2	P-36	PA-3	7/3	I-2	S-2	C-3	1.7	D-1	22	Extremely good	
Example 80	AS-9	M-1	P-48	PR-6	7/3	I-2	S-2	C-1	1.2	D-1	27	Good	
Comparative Example 13	AS-7	M-2	PR-4	PA-3	5/5	I-2	S-2	C-1	1.3	D-2	9	Dots lost	
Comparative Example 14	AS-6	M-2	PR-5	PA-2	8/2	I-1	S-1	C-1	1.5	D-1	7	Dots lost	
Comparative Example 15	AS-9	M-3	PR-6	PA-1	9/1	I-1	S-1	C-3	1.5	D-2	11	Good	

(Examples 81 to 100; Comparative Examples 16 to 18)

[Coating of photosensitive layer]

The following photosensitive layer coating solution was prepared, applied to the aluminum support by means of a wire bar in a dry coated amount set forth in Table 10, and then dried at a temperature of 115°C in a hot air dryer for 45 seconds to form a photosensitive layer thereon.

Photosensitive layer coating solution

Addition-polymerizable compound (compound set forth in Table 10)	1.0 g
Binder polymer (compound set forth in Table 10)	1.0 g
Infrared absorber (IR-1)	0.08 g
Heat polymerization initiator (compound set forth in Table 10)	0.3 g
fluorine-based nonionic surface active agent (Megafac F-177, produced by DAINIPPON INK & CHEMICALS, INC.)	0.01 g
Naphthalenesulfonate of victoria pure blue	0.04 g
Methyl ethyl ketone	9.0 g
Propylene glycol monomethyl ether	8.0 g
Methanol	10.0 g

[Coating of protective layer]

A 3 wt-% aqueous solution of a polyvinyl alcohol (saponification degree: 98 mol-%; polymerization degree: 550) was applied to the photosensitive layer in a dry coated amount of 2 g/m², and then dried at a temperature of 100°C for 2 minutes as necessary.

[Exposure of negative-working photosensitive lithographic printing plate]

The negative-working photosensitive lithographic printing plate thus obtained was then exposed under the conditions of output of 9W, external drum rotary speed of 210 rpm, plate surface energy of 100 mJ/cm² and resolution of 2,400 dpi using a Type Trendsetter 3244VFS (produced by Creo Co., Ltd.) equipped with a water-cooled 40W infrared semiconductor laser.

[Development/plate making]

The printing plate thus exposed was then subjected to development/plate making at a temperature of 30°C using a Type Stablon 900N automatic developing machine produced by Fuji Photo Film Co., Ltd. loaded with the developer set forth in Table 10 and a 1 : 1 water-diluted solution of a Type FN-6 finisher produced by Fuji Photo Film Co., Ltd. to obtain a lithographic printing plate.

[Image area printing durability test]

As a printing machine there was used Lithron produced by Komori Corporation. As an ink there was used Graph G(N) produced by DAINIPPON INK & CHEMICALS, INC. The printed matter was then observed at the solid image area. The number of the sheet which began to show blurred image was then counted to examine the image area printing durability. The greater the number is, the better is printing durability.

[Forced test on dot area printing durability]

As a printing machine there was used Lithron produced by Komori Corporation. As an ink there was used Graph G(N) produced by DAINIPPON INK & CHEMICALS, INC. When 5,000 sheets were printed, the printing plate was then wiped off at the dot area with a printing sponge wet with a Type CL-2 plate cleaner produced by Fuji Photo Film Co., Ltd. to remove the ink from the surface of the plate. Thereafter, 10,000 sheets were printed. The printed matter was then visually observed to see if dots were lost on the plate.

Table 10

Example No.	Support	Photosensitive layer					Protective layer	Developer	Printing durability		
		Addition-polymerizable compound	Binder polymer		Height ratio (1 : 2)	Heat polymerization initiator			Dry coated amount (g/m ²)	Image area (unit: 10,000 sheets)	Dot area
			1	2							
Example 81	AS-8	K-3	P-31	None	-	01-1	None	D-3	38	Extremely good	
Example 82	AS-9	K-3	P-32	None	-	01-1	Provided	D-3	40	Good	
Example 83	AS-5	M-2	P-33	None	-	01-2	None	D-1	25	Good	
Example 84	AS-8	M-1	P-35	None	-	01-1	Provided	D-1	33	Extremely good	
Example 85	AS-6	M-3	P-36	None	-	01-2	None	D-3	21	Extremely good	
Example 86	AS-8	M-3	P-37	None	-	01-3	None	D-3	28	Extremely good	
Example 87	AS-7	M-2	P-39	None	-	01-1	Provided	D-3	12	Extremely good	
Example 88	AS-7	M-2	P-40	None	-	01-1	None	D-2	23	Extremely good	
Example 89	AS-8	M-1	P-41	None	-	01-2	None	D-2	36	Extremely good	
Example 90	AS-9	K-1	P-43	None	-	01-2	Provided	D-1	27	Good	
Example 91	AS-7	K-3	P-46	None	-	01-3	Provided	D-3	30	Good	
Example 92	AS-5	M-3	P-48	None	-	01-1	None	D-3	24	Good	
Example 93	AS-8	M-3	P-50	None	-	01-2	None	D-2	34	Good	
Example 94	AS-8	M-2	P-31	P-36	8/2	01-1	Provided	D-3	31	Good	
Example 95	AS-6	M-1	P-35	P-46	9/1	01-3	None	D-1	21	Extremely good	
Example 96	AS-8	M-3	P-47	P-50	8/2	01-2	None	D-2	24	Extremely good	
Example 97	AS-8	M-2	P-31	PR-4	8/2	01-2	None	D-1	36	Extremely good	
Example 98	AS-7	M-3	P-31	PA-1	5/5	01-1	Provided	D-1	23	Extremely good	
Example 99	AS-7	K-2	P-32	PA-2	7/3	01-1	None	D-3	22	Extremely good	
Example 100	AS-5	K-3	P-35	PR-6	7/3	01-2	None	D-2	27	Good	

Comparative Example 16	AS-7	M-3	PR-4	None	-	01-1	1.3	None	D-1	3	Dots lost
Comparative Example 17	AS-8	M-2	PR-5	None	-	01-1	1.2	None	D-3	5	Good
Comparative Example 18	AS-9	M-1	PR-6	PA-1	9/1	01-3	1.2	Provided	D-2	10	Dots lost

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 10

The chemical structure shows a central benzene ring substituted with a chlorine atom (Cl) and a sulfonate group (SO_3^-). This central ring is connected via double bonds to two phthalocyanine-like systems. Each phthalocyanine system consists of a central nitrogen atom (N) with a positive charge, coordinated by four carbon atoms in a ring, which is further fused to a benzene ring. The entire structure is symmetrical.

The top structure shows a segment of a poly(4-vinylpyridine) chain, represented as a repeating unit with a positive charge. The bottom structure shows a monomer with a benzene ring substituted with four methyl groups and a sulfonate group (SO_3^-).

The image shows two chemical structures. On the left is the triphenylmethyl cation, consisting of a central sulfur atom (S) with a positive charge (+) bonded to three phenyl rings. On the right is a sulfonate group, consisting of a benzene ring bonded to a sulfur atom (S) which is also bonded to three oxygen atoms (O), with a negative charge (-) on one of the oxygens.

[Developer in Table 10]

D-3

	Monohydrate of sodium carbonate	10 g
5	Potassium hydrogencarbonate	10 g
	Sodium isopropyl naphthalenesulfonate	15 g
	Sodium dibutyl naphthalanesulfonate	15 g
	Sodium salt of ethylene glycol mononaphthylether monosulfate	10 g
10	Sodium sulfite	1 g
	Tetrasodium ethylenediaminetetraacetate	0.1 g
	Ion-exchanged water	938.9 g

As can be seen in Tables 8 to 10, the photosensitive
15 lithographic printing plates according to the invention
comprising a photosensitive layer containing a polyvinyl
alcohol resin binder modified with an acetal skeleton having
an alicyclic structure provided printing plates having an
extremely good printing durability.

20 The photosensitive lithographic printing plate of the
invention comprises a photosensitive layer containing a
polyvinyl alcohol resin binder modified with an acetal skeleton
having an alicyclic structure, making it possible to provide
a lithographic printing plate having an extremely good printing
25 durability. The photosensitive lithographic printing plate

